

06-23-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventorship..... James et al.
Applicant..... Microsoft Corporation
Attorney's Docket No. MS1-559US
Title: Methods, Systems, Architectures and Data Structures For Delivering Software via a Network

TRANSMITTAL LETTER AND CERTIFICATE OF MAILING

To: Commissioner of Patents and Trademarks,
Washington, D.C. 20231

From: Lance R. Sadler (Tel. 509-324-9256; Fax 509-323-8979)
Lee & Hayes, PLLC
421 W. Riverside Avenue, Suite 500
Spokane, WA 99201

The following enumerated items accompany this transmittal letter and are being submitted for the matter identified in the above caption.

1. Specification—title page, plus 68 pages, including 96 claims and Abstract
2. Transmittal letter including Certificate of Express Mailing
3. 16 Sheets Formal Drawings (Figs. 1-20)
4. Return Post Card

Large Entity Status ☒ [x]

Small Entity Status ☐ []

Date: 6/21/00

By: 

Lance R. Sadler
Reg. No. 38,605

CERTIFICATE OF MAILING

I hereby certify that the items listed above as enclosed are being deposited with the U.S. Postal Service as either first class mail, or Express Mail if the blank for Express Mail No. is completed below, in an envelope addressed to The Commissioner of Patents and Trademarks, Washington, D.C. 20231, on the below-indicated date. Any Express Mail No. has also been marked on the listed items.

Express Mail No. (if applicable) EL624351966

Date: 6/21/2000

By: 

Lori A. Vierra

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

**Methods, Systems, Architectures and Data Structures
For Delivering Software via a Network**

Inventor(s):

Sarita James

Brian Syme

Suryanarayanan Raman

Lawrence Sanchez

John Licata

RELATED APPLICATIONS

The following patent applications are related to the present application, are assigned to the assignee of this patent application, and are expressly incorporated by reference herein:

- U.S. Patent Application Serial No. _____, entitled “Single Window Navigation Methods and Systems”, bearing attorney docket number MS1-560us, and filed on the same date as this patent application;
- U.S. Patent Application Serial No. _____, entitled “Methods and Systems of Providing Information to Computer Users”, bearing attorney docket number MS1-557us, and filed on the same date as this patent application;
- U.S. Patent Application Serial No. _____, entitled “Network-based Software Extensions”, bearing attorney docket number MS1-563us, and filed on the same date as this patent application;
- U.S. Patent Application Serial No. _____, entitled “Authoring Arbitrary XML Documents Using DHTML and XSLT”, bearing attorney docket number MS1-583us, and filed on the same date as this patent application;
- U.S. Patent Application Serial No. _____, entitled “Architectures For And Methods Of Providing Network-based Software Extensions”, bearing attorney docket number MS1-586us, and filed on the same date as this patent application.
- U.S. Patent Application Serial No. _____, entitled “Task Sensitive Methods And Systems For Displaying Command Sets”, bearing attorney docket number MS1-562us, and filed on the same date as this patent application.

TECHNICAL FIELD

This invention relates to methods and systems for providing software via a network. More specifically, the invention pertains to Internet-based delivery of software.

BACKGROUND

Installation of traditional PC applications requires physical media, such as a disk or CD-ROM that must be physically inserted into a computer in order for software to be loaded onto a user's computer. Typically, this process requires the user to enter settings information that can be confusing to the user. Once the software is installed, it is typically fixed in terms of its location and functionality. When the software is updated, the user must typically purchase additional physical media and repeat the installation process so that they can use the updated software. In this model, the software is fixed in its association with the computer on which it was installed. If a user moves to another computer, they will not be able to use the specific software on their machine.

As computing continues to evolve in the environment of the Internet, it has become clear that the traditional software delivery model described above is inadequate to meet the demands of consumers who desire dynamic, flexible, and adaptable software. Software delivery over the Web is becoming the subject of increasing focus by those who develop and deliver software. Unlocking the potential for Web-based software delivery will require smart, innovative and streamlined solutions, especially in situations where bandwidth may be limited.

Accordingly, this invention arose out of concerns associated with providing new software delivery models that are particularly well-suited for network-based software delivery, e.g. delivery via the Internet.

SUMMARY

Methods and systems for network-based software delivery are described. In one embodiment, an application program or software platform resides on a

1 client. The program or platform is configured so that it is extensible based on
2 software extensions that are deliverable over a network such as the Internet.
3 Various extensions can be developed by third party developers for incorporation
4 into the program or platform.

5 In one described embodiment, extension files that comprise a software
6 extension are hosted on a network server such as an Internet server. These include
7 descriptor files that describe aspects of the software extension. These descriptor
8 files logically describe an extension to the program or platform and designate the
9 location of other extension files. Extensions are incorporated on a client by
10 navigating to a particular network or Internet site through which the extensions
11 can be accessed. The files describing the extension files are downloaded on the
12 client. These files tell the client where, when and how the particular extension can
13 be plugged into the program or platform, as well as where to find the appropriate
14 extension files and how to download them. The extension files are then
15 downloaded and incorporated into the platform.

16 In one embodiment, an inventive software architecture is provided for
17 handling and consolidating particular types of descriptive files associated with
18 various extensions. A filtering mechanism called attachment points, is used to
19 create handlers for the different descriptive types of files that define a software
20 extension. Each of these handlers is known as an attachment manager.
21 Attachment managers are provided for each extensible feature type. The
22 attachment managers interpret data from extensions files which are supplied by
23 attachment points. In addition to predefined attachment managers, custom
24 attachment managers can be created using data from attachment points. When an
25 extension extends a particular feature type, the attachment points ensure that only

the appropriate attachment manager is notified so that the feature type can be incorporated into the program or platform efficiently.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a high level view of a system that can be utilized in accordance with one described embodiment.

Fig. 2 is an exemplary computer system that can be utilized in accordance with the described embodiment.

Fig. 3 is a diagram of an exemplary Extension Definition File (EDF) and package manifest (PKG) in accordance with one described embodiment.

Fig. 4 shows a portion of an EDF schema in accordance with the described embodiment.

Fig. 5 shows a portion of an EDF schema in accordance with the described embodiment.

Fig. 6 shows a portion of a PKG in accordance with the described embodiment.

Fig. 7 is a block diagram illustrating how file hashes can be used for versioning in accordance with one embodiment.

Fig. 8 is a block diagram that illustrates two exemplary package objects in accordance with one embodiment.

Fig. 9 is a flow diagram that describes steps in a method in accordance with one described embodiment.

Fig. 10 is a flow diagram that describes steps in a method in accordance with one described embodiment.

Fig. 11 is a block diagram that illustrates an exemplary package manifest creation tool in accordance with one described embodiment.

Fig. 12 is a flow diagram that describes steps in a method in accordance with one described embodiment.

Fig. 13 is a flow diagram that describes steps in a method in accordance with one described embodiment.

Fig. 14 is a flow diagram of steps in a method in accordance with the described embodiment.

Fig. 15 is a flow diagram of steps in a method in accordance with the described embodiment.

Fig. 16 shows a portion of an exemplary catalog structure in accordance with the described embodiment.

Fig. 17 is a block diagram of a software architecture in accordance with the described embodiment.

Fig. 18 is a flow diagram of steps in a method in accordance with the described embodiment.

Fig. 19 is a diagram that illustrates one aspect of attachment point architecture in accordance with the described embodiment.

Fig. 20 is a diagram that illustrates one aspect of the Fig. 17 architecture.

DETAILED DESCRIPTION

Overview

The methods and systems described just below provide a mechanism by which software can be delivered over a network, such as the Internet. In one specific example, various functionalities can be added dynamically to an

1 application program. The functionalities or “extensions” as they will be referred
2 to, can be advantageously added via a network such as the Internet. Extensions,
3 which can be associated with various levels of granularity, can be added using
4 only a Web URL as a basis for extension installation. That is, all of the files that
5 comprise an extension can be maintained on the Web and accessed via one or
6 more Web sites.

7 Extensions can be described utilizing a hierarchical tag-based language
8 which facilitates handling and use of the various extensions. In one particular
9 implementation, a software platform is provided that can incorporate various
10 functionalities. The software platform and the inventive architecture described
11 below enable third and fourth party developers to develop extensions for the
12 platform that can be easily and seamlessly incorporated into the platform, while
13 relieving the developers of any requirements associated with knowledge about
14 how the extensions will be incorporated into the platform. Thus, the incorporation
15 of third party extensions is essentially a transparent process, as far as developers
16 are concerned.

17 Consider for example, Fig. 1 which shows a user’s computer 100 and
18 several so-called extension sources 102, 104, and 106. The extension sources can
19 comprise any entity from which a software extension can be obtained via a
20 network. In an exemplary implementation, the network can comprise the Internet,
21 although other networks (e.g. LANs and WANs) can certainly be utilized.
22 Extension sources can include, without limitation, business entities such as retail
23 stores that might maintain a network site. In one implementation, a user can
24 execute software on their computer that provides an application program or
25 software platform. In this document, the terms “application program” and

“software platform” will be used interchangeably. Each of the different extension sources 102-106 can provide software extensions that can plug into the software platform that is executing on the user’s machine. These extensions are deliverable via a network such as the Internet, and assist in providing applications that can be executed on the user’s machine. In the described embodiment, the extensions are logically described in XML which is in line with emerging industry standards. Additionally, the use of XML assists in the future discoverability of extensions by promoting XML DOM properties on the Internet. It will be appreciated, however, that any suitable format can be used for describing the extensions, e.g. a binary description could be used.

Extensions can be delivered from any number of different extension sources. The inventive methods and systems provide a streamlined and organized way to handle the provided extensions. The use of XML advantageously enables efficient handling of extensions from multiple different extension sources, without unduly taxing the software components that utilize specific portions of an extension or extensions.

In one particular implementation, the software platform on the user’s machine provides various different integrated functionalities that enable a user to accomplish different document-centric tasks. An exemplary system is described in the U.S. Patent Application entitled “Single Window Navigation Methods and Systems”, incorporated by reference above.

Exemplary Computer Environment

Fig. 2 shows an exemplary computer system that can be used to implement the embodiments described herein. Computer 130 includes one or more

processors or processing units 132, a system memory 134, and a bus 136 that couples various system components including the system memory 134 to processors 132. The bus 136 represents one or more of any of several types of bus structures, including a memory bus or memory controller, a peripheral bus, an accelerated graphics port, and a processor or local bus using any of a variety of bus architectures. The system memory 134 includes read only memory (ROM) 138 and random access memory (RAM) 140. A basic input/output system (BIOS) 142, containing the basic routines that help to transfer information between elements within computer 130, such as during start-up, is stored in ROM 138.

Computer 130 further includes a hard disk drive 144 for reading from and writing to a hard disk (not shown), a magnetic disk drive 146 for reading from and writing to a removable magnetic disk 148, and an optical disk drive 150 for reading from or writing to a removable optical disk 152 such as a CD ROM or other optical media. The hard disk drive 144, magnetic disk drive 146, and optical disk drive 150 are connected to the bus 136 by an SCSI interface 154 or some other appropriate interface. The drives and their associated computer-readable media provide nonvolatile storage of computer-readable instructions, data structures, program modules and other data for computer 130. Although the exemplary environment described herein employs a hard disk, a removable magnetic disk 148 and a removable optical disk 152, it should be appreciated by those skilled in the art that other types of computer-readable media which can store data that is accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, random access memories (RAMs), read only memories (ROMs), and the like, may also be used in the exemplary operating environment.

A number of program modules may be stored on the hard disk 144, magnetic disk 148, optical disk 152, ROM 138, or RAM 140, including an operating system 158, one or more application programs 160, other program modules 162, and program data 164. A user may enter commands and information into computer 130 through input devices such as a keyboard 166 and a pointing device 168. Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish, scanner, or the like. These and other input devices are connected to the processing unit 132 through an interface 170 that is coupled to the bus 136. A monitor 172 or other type of display device is also connected to the bus 136 via an interface, such as a video adapter 174. In addition to the monitor, personal computers typically include other peripheral output devices (not shown) such as speakers and printers.

Computer 130 commonly operates in a networked environment using logical connections to one or more remote computers, such as a remote computer 176. The remote computer 176 may be another personal computer, a server, a router, a network PC, a peer device or other common network node, and typically includes many or all of the elements described above relative to computer 130, although only a memory storage device 178 has been illustrated in Fig. 2. The logical connections depicted in Fig. 2 include a local area network (LAN) 180 and a wide area network (WAN) 182. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets, and the Internet.

When used in a LAN networking environment, computer 130 is connected to the local network 180 through a network interface or adapter 184. When used in a WAN networking environment, computer 130 typically includes a modem 186

1 or other means for establishing communications over the wide area network 182,
2 such as the Internet. The modem 186, which may be internal or external, is
3 connected to the bus 136 via a serial port interface 156. In a networked
4 environment, program modules depicted relative to the personal computer 130, or
5 portions thereof, may be stored in the remote memory storage device. It will be
6 appreciated that the network connections shown are exemplary and other means of
7 establishing a communications link between the computers may be used.

8 Generally, the data processors of computer 130 are programmed by means
9 of instructions stored at different times in the various computer-readable storage
10 media of the computer. Programs and operating systems are typically distributed,
11 for example, on floppy disks or CD-ROMs. From there, they are installed or
12 loaded into the secondary memory of a computer. At execution, they are loaded at
13 least partially into the computer's primary electronic memory. The invention
14 described herein includes these and other various types of computer-readable
15 storage media when such media contain instructions or programs for implementing
16 the steps described below in conjunction with a microprocessor or other data
17 processor. The invention also includes the computer itself when programmed
18 according to the methods and techniques described below.

19 For purposes of illustration, programs and other executable program
20 components such as the operating system are illustrated herein as discrete blocks,
21 although it is recognized that such programs and components reside at various
22 times in different storage components of the computer, and are executed by the
23 data processor(s) of the computer.
24
25

Extensions

An “extension”, as used in this document, will be considered to include, without limitation, software functionality and content that can be added to an application program or software platform. These additions typically provide some type of functionality that the application program may not have had before the extension was incorporated, or alter the behavior of at least one existing feature. The extension is incorporated or integrated directly into the application program in a way that changes, to some degree, the manner in which the application program behaves or operates. Extensions provide dynamically added content and can provide applications (such as an email application), plug-ins to extend existing applications (like a fax plug-in to an email application), or simply web pages, to name just a few.

In the described embodiment, extensions are described using XML, an industry-standard, text-based markup language. XML greatly facilitates the extensibility of software content. Specifically, various extensions can be authored by third parties and described in XML in a manner that enables the extensions to be readily integrated into application programs. It should be appreciated, however, the XML constitutes but one exemplary way of describing and using the extensions. Other ways can, of course, be used.

Exemplary Extension Organization

In the described embodiment, extensions are organized in three separate but related portions: an Extension Definition File (EDF), a Package Manifest (PKG), and the code, components, or “bits” that make up or define the extension. An EDF can be, but need not be associated with a URL (Universal Resource Locator) that

1 provides a way for a client to access the EDF. By convention and choice, the PKG
2 file is located at the same URL as the EDF. It will be appreciated that the
3 described EDFs and PKG are each not required for the other to be used. It just so
4 happens that, in the example that is given in this document, the two are employed
5 together. To that end, each of these features can be separately and independently
6 employed.

7 EDFs describe logical attachments to an application program or software
8 platform, while PKGs specify the physical files and resources that are used in an
9 extension. There can be a one to one correspondence between EDFs and PKGs.

10 Fig. 3 shows an exemplary organization 300 that includes an EDF 302 and
11 a corresponding package manifest (PKG) 304. In the illustrated example, the EDF
12 302 uses XML, a hierarchical tag-based language, to describe the logical
13 attachments or extensions to an application program. The corresponding PKG 304
14 also specifies the physical files and resources that are associated with a particular
15 extension in XML. Exemplary file types are shown to the right of PKG 304 and
16 include, without limitation, HTM, GIF, UDO, XML, DLL, and various other types
17 of files.

18 19 **Extension Definition File (EDF)**

20 In the described example, an EDF is an XML file that logically describes an
21 extension. For example, the EDF can describe HTML that makes up a user
22 interface (UI), the objects that contain code for implementing various functions,
23 and the like. The EDF can also contain all or part of the functionality that
24 comprises an extension. For instance, the HTML that describes a toolbar could be
25 incorporated directly into an EDF file, and a toolbar attachment manager could

1 read it from the EDF file, instead of from a URL. The information contained in
2 the EDF is processed and (together with the information contained in the PKG),
3 the appropriate files are automatically installed on a user's computer. This is done
4 unobtrusively without manipulating the computer's persisted settings, as might be
5 found in the user's system registry.

6 An EDF, implemented in XML, contains various tags that are associated
7 with various extensions. The various tags can correspond to:

- 8 • User interface elements
- 9 • Behaviors/Components/Objects
- 10 • Store Elements
- 11 • User-defined objects
- 12 • Or anything else that represents a point of extensibility in the
application or platform

13 EDFs advantageously have an "open schema" which means that third party
14 developers can extend the extension mechanism and include their own extensions
15 by creating their own tags. Additionally, extensions can themselves be extended
16 by other developers. EDFs can also have one or more predefined tags. Exemplary
17 predefined XML tags for user interface elements can include tags for feature types
18 such as: tool bars, accelerators, menu items, and themes. These feature types are
19 utilized in the single navigable window application incorporated by reference
20 above and defined in the table immediately below:

Feature Type	Definition
Tool Bars	Horizontal command containers above the document area.
Accelerators	Keyboard shortcuts for commands
Menu Items	Pop-up or drop-down menu choices that third parties can add to well-known, named menu attachments in the platform
Themes	A data-driven way to provide overrides for well-known resources of the platform, such as default buttons or default style sheet

Table 1

Exemplary predefined XML tags for behaviors/components/objects include tags for Services. These feature types are utilized in the single navigable window application incorporated by reference above and defined in the table immediately below:

Feature Type	Definition
Services	Services are objects that extend existing objects (such as the application, window, or document) in the application or platform's Object Model. For example, editing functions use Object Model Attachments attached to the window or document that maintain document context and editing state per-window. These can also include Object Model Attachments attached to the application (such as a spellchecker dictionary object)

Table 2

Exemplary predefined XML tags for store elements include tags for content classes and offline data sources. These feature types are utilized in the single navigable window application incorporated by reference above and defined in the table immediately below:

Feature Type	Definition
Content Classes	Allow extension writers to define new types of XML documents with new schemas.
Offline Data Sources	Allow for extension writers to define store replication instructions in an EDF.

Table 3

EDF Schema

In the described embodiment, the EDFs have a particular XML schema that is utilized. The schema comprises collections of XML tags that are arranged in a hierarchical organization to facilitate information dissemination to software components that need certain extensions. In the described embodiment, the outer (encompassing tag) for EDFs is an “extension” tag.

Fig. 4 shows an exemplary extension tag. “extension” tags can include one or more of the following attributes, all of which are optional:

Attribute	Definition
urn	ID for the extension. It allows extension writers to specify relative locations for content in EDFs without using relative paths or fixed URLs. It also allows hosting administrators to move around extensions on servers without breaking any links.
name	Name that can be used in a status bar or message display
version	Vendor-determined version number for the extension.
lastUpdate	Date/time that the EDF was last modified.
description	Brief description of the extension.

Table 4

Within the “extension” outer tag are one or more child tags, also referred to as “top level tags”. These top level tags are each associated with a feature type

1 that can be added by a particular extension. Exemplary feature types are discussed
2 in connection with Tables 1-3 above. Underneath each top level tag there can be
3 one or more child tags that are individually associated with a particular feature of
4 the feature type that is to be added by a particular extension.

5 Fig. 5 shows an exemplary XML schema organization in accordance with
6 this embodiment. For each top level tag in an EDF, there is an associated
7 attachment manager which is a software component that receives data associated
8 with the tag so that the data can be used to incorporate the extension into the
9 platform or application program. Different attachment managers may interpret the
10 data from the tag in different ways to provide different types of extensibility, so
11 different top level tags will contain different types of data in different structures.
12 This will become more evident in the "Architecture" section below. Note that the
13 "edf:" XML namespace qualifier enables support of an open schema where
14 extensions can provide their own tags and corresponding attachment managers.
15 Tags within the edf namespace are used by built-in attachment managers in the
16 application or software platform. Tags in other namespaces are used by third-
17 parties to provide additional points of extensibility.

18 19 **Package Manifest (PKG file)**

20 The package manifests (PKGs) assist in organizing the downloading of
21 software in the form of multiple files over a network such as the Internet. The
22 PKGs are advantageously employed, in the example given in this document, with
23 EDFs. As pointed out above, however, the techniques discussed in connection
24 with the PKGs can be deployed independently of EDFs and in any suitable
25 scenario where it is desirable to deliver software over a network such as the

1 Internet. While the EDFs describe the logical attachment of extensions into an
2 application program or platform, the package manifest's role is to assist in one or
3 more of: organized delivery, validation and/or, updating of files associated with the
4 various extensions that can be provided.

5 In designing a delivery mechanism for Web-assisted delivery of software
6 content or files, several considerations are of interest.

7 Whenever possible, it is desirable to reduce the size of required downloads
8 during update and installation operations. To address this consideration, software
9 content is broken into multiple packages. Each package contains a group of one or
10 more files that implement a common or well-defined functionality. By breaking
11 the content into individual packages, the size of the required download during
12 installation and update can be minimized. Each package is then described by a
13 package manifest (PKG) that includes file information such as file locations and
14 hash values that can be used for validation or security and versioning.

15 It is also desirable to give the end user a Web-like experience. To do this,
16 extensions are loaded in a manner that feels to a user more like they are loading a
17 web page, rather than traditional software packages where the user has to wait
18 until the entire package is loaded before they can interact with it. In the described
19 embodiment, users are given a web-like experience by streaming the extension
20 files down to the client so that a user can begin to interact with an application
21 program much sooner than if they had to wait for the entire software application
22 program to load. For example, if there are user interface (UI) image files
23 streaming down, the user can see the UI as the files stream in. Consider, for
24 example, the single application program having the multiple different
25 functionalities that is described in the patent application incorporated by reference

1 above. A user might browse to an email functionality and download the files that
2 are necessary to interact with the email functionality. Files that are associated
3 with another different functionality would then be downloaded after the files
4 associated with the email functionality. In this way, the user can begin to operate
5 within a particular functionality without having to wait for all of the files
6 associated with all of the other functionalities.

7 Another consideration of interest pertains to the efficiency with which the
8 extension files or "bits" are delivered to the client. To address this consideration,
9 the described embodiment utilizes a couple of different download approaches: a
10 throttled download and a background download. Throttled downloading conducts
11 download operations while taking into account the available bandwidth and type
12 of media over which the files are being transferred. Any suitable throttled
13 download process can be employed and will be understood by those of skill in the
14 art. Background download is conducted while the user is working within the
15 application program and is implemented by allocating a background thread so that
16 the user can continue their work. One optimization that is utilized is that packages
17 are prioritized and delivered in accordance with what a user might be working on.

18 Another consideration is associated with optimizing the user's computing
19 experience. Here, the user's experience is optimized by making available the most
20 common scenarios for the user. This is effectively directed to giving the user the
21 functionality that they want first, and then, through the background download
22 process, providing the code that implements functionalities that the user might use
23 in the future. To determine which functionalities a user desires to have first, an
24 automated scenario-based packaging process is provided that runs against file
25 usage logs from scripted scenarios.

1 All of these considerations and the inventive solutions directed to
2 addressing the considerations are discussed in detail in the sections that follow
3 below.

4 5 Package Manifest Definition

6 In the described embodiment, a package manifest (PKG file) comprises a
7 list of files that are utilized in a package. The list is advantageously compressed
8 somewhat and digitally signed. Each package manifest can contain a list of one or
9 more files each of which can include an associated hash, as well as download
10 directives that control caching of the files. Once an extension is authored, a
11 software tool can be used to generate the package manifest.

12 In addition, the package manifest can specify several other pieces of
13 information:

- 14
15 • FILE GROUP

16 All files in an extension can be labeled according to a number of predefined
17 file groups. The file group of a particular file determines when the particular file
18 gets downloaded, where it is stored on the client, and how it gets packaged. In the
19 described embodiment, four predefined file groups are provided and are listed and
20 described in the table immediately below:

21
22

23 Group name	When downloaded	Where stored on the client	Packaging	Content
24 Required	Downloaded before any other files in the extension.	NetDocs package cache	All required files in an extension are	DLLs included so that a user will not have to wait for a prolonged

25

			packaged together as a CAB* file.	period of time before clicking on a UI element
Offline	Offline files start getting downloaded as soon as Required are down. Providing the user stays on line long enough, these files will all get downloaded and will later be available for offline use.	NetDocs package cache	File are sent down individually.	Bulk of the UI files.
On demand	Only downloaded when they are requested for the first time.	NetDocs package cache	Files are sent down individually.	To avoid using up disk space on the client, advanced features can be put in this category.
Online only	Downloaded on demand. Content is only available when the user is online.	WinInet Cache	Files are sent down individually	Content that is not to be provided offline. Examples include help pages and other content that can consume a large amount of disk space.

* CAB stands for the CABinet technology that Internet Explorer uses to package bits for download. CAB files average from 2 to 3:1 compression, and are optimized for quick expansion. CAB files have the added security benefit that they are easily signed.

- FILE DOWNLOAD PRIORITY

Files in each group are listed according to the order in which they should be downloaded. This download order is implicit in the ordering of the files in the package manifest, an example of which is shown in Fig. 6.

- HASH VALUE FOR SECURITY/VERSIONING

Individual files in the package manifest can have an associated hash value. Each hash value is generated by running the file through an encryption algorithm. An exemplary encryption algorithm is Microsoft's CryptoAPI. In the illustrated example, each file can be listed with a base 64-encoded hash value, so that the file can be validated once the content arrives at the client. Specifically the package manifest is sent to the client in a secure manner (i.e. it is digitally signed). The

1 package manifest contains the hash values for individual files. When the
2 individual files are received by the client, each of the files can be run through the
3 same Crypto API that was used to provide the hash values in the package
4 manifest. If the hash values for a particular file compare favorably, then the file
5 has not been altered and is secure.

6 When a file is updated, hash values can serve a useful purpose in
7 identifying files that have not been changed between different versions of an
8 extension. Consider Fig. 7, for example. There, an old directory 700 in a client
9 package cache contains package A which include two files—file 1 with hash = x,
10 and file 2 with hash = y. Assume that this package is associated with an older
11 version of an extension. When an updated version is produced, its package
12 manifest is delivered to the client. The updated extension version is represented
13 on a source directory of a code or web server 704. The package manifest includes
14 the hash values for all of the files in the new extension version. A new client
15 destination directory 702 is defined for all of the files of the new extension. If any
16 of the hash values for files in the new extension are the same as the hash values of
17 the files in the old directory 700, then those files can be copied directly from the
18 old directory 700 to the new destination directory 702. In this example, file 1's
19 hash value is the same as the hash value for file 1 on the source directory 704, so it
20 can be copied into the new destination directory 702. File 2's hash value, however
21 is different from the hash value for file 2 on the source directory, so it is not copied
22 from the old directory 700. Rather, file 2 is downloaded from the code server. A
23 new file 3 has been added and is also downloaded from the code server. Hence, in
24 this example, a new version of an extension resulted in a download of less than all
25 of the files in the extension version. This is because hash values for each of the

1 files in the old extension version were able to be compared with hash values of the
2 files in the new extension version. Those hash values that are the same indicate
3 files that have not changed as between versions.

4 Using hash values for versioning has two important advantages over
5 traditional versioning schemes. First, the update process is automatic. That is,
6 with an explicit version number, it is possible to forget to update the version
7 number when shipping a new release of a file. Using hash values avoids this
8 problem. Second, versioning does not rely on file types. Specifically, traditional
9 versioning schemes commonly embed version information within files; however,
10 not all files (e.g. GIF files) support embedded version information. In the present
11 example, using hash values for versioning does not depend on whether a particular
12 file type supports or does not support embedded version information. In addition,
13 the version information can be stored separately from the file itself. Thus, access
14 to actual file to determine whether it is current is not needed.

15
16 • TOTAL STORAGE SIZE OF PACKAGE

17 The total storage size of a package is useful at download time to verify that
18 the user has sufficient disk space.

19
20 • ClassID's FOR THE DLLs

21 Listing ClassIDs for each DLL is necessary to enable script writers to
22 create classes by scripting against the OM. Additionally, this enables a
23 determination of which package contains the code for a particular class.

24
25 • DLL LOAD DEPENDENCIES

007.290-6666560

The reason for the dependencies section is to allow for legacy code that relies on being loaded by virtue of being in the search path of some other dll. In this case we have to make sure that the dependency dll is in the package cache directory before the dependant dll is loaded. Fig. 6 shows an exemplary package manifest 600 that is defined in a hierarchical tag-based language. Advantageously, the tag-based language comprises XML which is desirably extensible and flexible. In this example, a number of tags are provided in a hierarchical arrangement. The “package” tag contains information about the size of the package. The “files” tag is a child of the “package” tag and contains information about the file groups that are contained in that particular package. The “file” tag is a child of the “group” tag and contains information about specific files that comprise the extension, i.e. file name and hash value. A “dependency” tag is provided as a child of the “file” tag and lists any dependencies as discussed above. A “COMClass” tag is also provided as a child of the “file” tag and contains IDs as mentioned above. The ordering of the file groups in this schema implicitly defines the download order of the files.

Package Delivery

To optimize package delivery, two different delivery schemes are utilized. First, a throttled download approach is utilized using known throttling download techniques. Here, considerations such as available bandwidth and media over which the extensions are being provided are considered.

Second, a background download approach is utilized. Background downloads enable a user to continue to work within an application program while content is downloaded. Foreground downloads are used when the user has

1 explicitly requested a file/extension by clicking, for example, on an extension link,
2 or requested an action, for example, by clicking on the “Compose” mail button,
3 that requires download of files which are not available locally.

4 Along with background downloads, a queue management feature is
5 provided. Specifically, when an extension must be installed or updated, a package
6 manager, which is essentially a software component that manages packages, is
7 provided with the following information:

- 8 • URL for the package manifest information on a code server
- 9 • URN for package destination directory in the package cache at the client
- 10 • (Optional) URN for the old package directory (if one exists) in the
11 package cache

12 From this information, the package manager creates a package object and
13 adds the package object to a download queue. The download queue is designed
14 for easy rearrangement of a package download order. Consider, for example, Fig.
15 8 which shows a portion of a download queue 800 that contains two package
16 objects—package object 802 (corresponding to package A) and package object
17 804 (corresponding to package B). The package objects maintain a list of which
18 files of a corresponding package have been downloaded or installed. In the
19 present example, files 1 and 2 from package A have been installed while file 3 has
20 not been installed; and files 1, 2, and 3 have not been installed from package B.
21 The download queue can be rearranged based on what the user is doing. That is,
22 based on the actions that a user takes, the priority of files that are to be
23 downloaded can be changed. In this example, the package manager is designed to
24 process the first uninstalled file in the package at the head of the download queue.
25 If, however, the user starts to use a file in an extension that is different from the

1 extension whose files are at the head of the download queue, the corresponding
2 package for the file that the user has started to use can be moved to the head of the
3 download queue. Because a file's package is specified by its URN, the file's
4 package can be quickly identified and located in the download queue. For
5 example, and considering Fig. 8, if one of the files in package B is requested
6 before the package manager has started to install package A's third file, then
7 package B will be moved to the head of the download queue.

8 Fig. 9 is a flow diagram that describes steps in a download queue
9 management method in accordance with the described example. The method can
10 be implemented in any suitable hardware, software, firmware or combination
11 thereof. In the present example, the method is implemented in software.

12 Step 900 receives one or more requests for an extension. The requests can
13 be generated in any suitable way. Step 902 creates a package object that
14 corresponds to each extension package that is to be downloaded. Step 904
15 arranges the package objects in a download queue. Step 906 then downloads files
16 corresponding to the package objects in the download queue. This step can be
17 implemented by, for example, starting at the head of the download queue and
18 downloading files until all of the files for a package object have been downloaded,
19 and then moving to the next package object. Step 908 ascertains whether a user
20 action requires a file that is not described in the current package object. If the
21 user's action does not require a file not described by the current package object,
22 then the method branches back to step 906 and continues to download files
23 associated with the current package object. If, on the other hand, the user's action
24 requires a files that is not described in the current package object, then step 910
25 moves the package object associated with the required file to the head of the

1 download queue and begins to download files associated with this newly-
2 repositioned package object. This step can be implemented by ascertaining which
3 package object is associated with the required file by ascertaining the URN
4 associated with the file. This URN specifies the file's package so that its package
5 object can be quickly located and moved to the front of the download queue.

6 7 Package Creation

8 One of the innovative features of the described embodiment is its
9 extensibility. That is, a software platform is provided in the form of an application
10 program that can be extended by various third-party user-defined extensions.
11 These extensions are delivered via the Web and are integrated directly into the
12 software platform. In order to provide an organized delivery process, packages
13 should be created in a uniform manner so that they can be predictably handled and
14 integrated into the software platform.

15 In accordance with the described embodiment, each package should
16 correspond to an end-user feature. For example, in the patent application
17 incorporated by reference above, separate packages are provided for each of the
18 email, contacts, document authoring, and planner functionalities. If packages that
19 do not depend on one another share a dependency, then this shared dependency
20 should become its own package. For example, there is no reason why the email
21 and document authoring functionalities should depend on one another, yet both of
22 them require the ability to publish content. By separating the publishing
23 functionality into its own package, a certain amount of download order flexibility
24 is preserved. Depending on what the user starts to work on, the files
25

1 corresponding to the email functionality or the document authoring can be
2 downloaded first.

3 Fig. 10 is a flow diagram that describes steps in a package creation method
4 in accordance with the described example. The method can be implemented in
5 any suitable hardware, software, firmware or combination thereof. Portions of the
6 method might, however, be implemented manually.

7 Step 1000 identifies end user features that are to be provided as extensions.
8 Step 1002 identifies any shared dependencies among the end user features. Step
9 1004 creates individual packages for the end user features. Step 1006 creates
10 individual packages for any shared dependencies among the end user features.

11 12 Automated Package Manifest Creation Tool

13 Advantageously, and in accordance with one implementation, an automated
14 package manifest tool is provided and takes various input parameters and
15 automatically creates a package manifest. The tool can be available to third
16 parties to assist them in creating a package manifest.

17 Fig. 11 shows an exemplary package manifest creation tool 1100 that is
18 desirably implemented in software. In this specific example, the tool can take the
19 following input parameters (some of which are optional):

- 20
- 21 • Extension directory
- 22 • File group information and DLL load dependencies (Optional)
- 23 • File usage statistics from scenario runs (Optional)

24 The extension directory input parameter specifies the directory containing
25 all of the files that will be described by the package manifest. If this is the only

parameter, then tool 1100 will generate a manifest in which the EDF and DLLs in the directory are listed in the “Required” set, and all other content is “Offline”.

The file group information and load dependencies parameter is optional. If an extension author has an idea of the categories in which his or her files should be placed, the categories should be specified here. For example, the author of the template manifest shown below knows that he wants his error handling GIF to be included in the package’s required set. His choices here will always be respected in the final manifest. Additionally, if the extension author knows of any DLL load dependencies, these should be specified here as well.

```
<?xml version="1.0"?>
<Package>
  <Files>
    <Group Name= "required">
      <File Name = "bar.dll"/>
      <File Name = "foo.dll"/>
      <Dependencies>
        <File Name= "bar.dll"/>
      </Dependencies>
    </File>
    <File Name= "myextension.edf"/>
    <File Name= "errorhandling.gif">
  </Group> ...
</Files>
</Package>
```

The file usage statistics from scenario runs parameter is an optional parameter. This parameter enables the file download priority to be determined based on scenario runs. A scenario is a script of tasks that the average user typically follows when using a product during a particular portion of product use. For example, one scenario might pertain to the tasks involved in sending an email

1 message (i.e. click "new mail" button, type in "TO" well, type is "Subject" well,
2 etc.). In the described embodiment, file usage statistics from scenario runs are
3 collected from running IIS logs on various scenarios. The different scenarios are
4 directed to ensuring, with some degree of probabilistic support, that the file
5 download order reflects, in some way, the files that will likely be used by the user
6 first.

7 It will be appreciated that the file usage statistics can be provided
8 dynamically by building a knowledge base that describes the actual tasks that
9 people typically accomplish. The information that is maintained in the knowledge
10 base can then be used to generate and adapt download scenarios that actually
11 conform to patterns that are established across a user base.

12 If extension writers want to pass the package manifest creation tool 1100
13 this information, they need to specify the log directory, as well as the start and end
14 dates of the section of the log that the tool should analyze. For third parties, the
15 download priority order within a group will be the order in which the group's files
16 were requested in the logs across all scenarios.

17 In one implementation, the approach is somewhat more sophisticated.
18 Additional information (in addition to the scripted steps) is stored in the IIS logs
19 and includes scenario priority and checkpoints. The scenario priority is a priority
20 that is assigned for each scenario. So, for example, if one scenario is ten times
21 more important than another scenario, this information can be maintained. The
22 priority (e.g. a rating from between 1 to 100, with 100 being the highest priority),
23 should be equal to a best guess as to the percentage of the time that users will step
24 through the scenario, assuming they use the extension at all. Checkpoints provide
25 a way to separate one scenario from another. For example, checkpoints designated

as “Offline” and “Shutdown” can be automatically added at the beginning and end of the scenarios, respectively, so there can be a differentiation between scenario runs in the log. Additionally, script authors can optionally use checkpoints mid-scenario to indicate a change in group priority, e.g. part of a scenario script could be labeled as an “On demand” feature and another part could be labeled as “Offline”.

Fig. 12 is a flow diagram that describes steps in a package manifest creation method in accordance with the described example. The method can be implemented in any suitable hardware, software, firmware or combination thereof. In the described example, various steps of the method are implemented by a manifest creation tool that is implemented in software.

Step 1200 provides a package manifest creation tool. This tool can be a software tool that resides on an extension author’s machine. Step 1202 receives information pertaining to an extension directory as a first input parameter. Step 1204 determines whether there is any file group information or load dependency information provided by the extension author. If there is, step 1206 receives the information as an input parameter. Step 1208 determines whether there is any file usage statistic information. Such information can be provided, in one embodiment, through the use of scenario runs as described above. If such information is provided, then step 1210 receives the information as an input parameter. Step 1212 then uses all of the information provided as input parameters to generate a manifest automatically.

1 Exemplary File Ordering Heuristics Based on File Usage Statistics

2 Fig. 13 is a flow diagram that describes but one exemplary file ordering or
3 sorting heuristic in accordance with the described embodiment. It is to be
4 understood that this specific example constitutes but one way of ordering files for
5 download. Accordingly, other heuristics can be used without departing from the
6 spirit and scope of the claimed subject matter.

7 Step 1300 sorts files by file group. Recall that in the illustrated example
8 above, files can be grouped in one of four possible groups: Required, Offline, On
9 Demand and Online Only. A file's group is determined first by the manifest, and,
10 if it does not provide any group information, then by the highest priority group
11 that it uses, according to checkpoint information in the log. Files in the
12 "Required" set should not be considered because their order is already known. If
13 no group information is included about a file, then an assumption is made that the
14 EDF and all DLLs are "Required" files and all other files in the directory are
15 "Offline".

16 Consider, for example, the following initial file usage information for three
17 different scenarios:

18 Scenario 1 file usage: 1) FileA.gif, 2)FileB.xml, 3)FileE.dll

19 Scenario 2 file usage: 1) FileC.xml, 2) FileA.gif

20 Scenario 3 file usage: 1)File D.js, 2)FileA.gif

21 Scenario 1 = priority 80

22 Scenario 2 = priority 80

23 Scenario 3 = priority 40

24 In this example, there are three scenarios that have files associated with
25 them. Each of the scenarios has a priority with which it is associated. The files

are first sorted by group (step 1300). Recall that in this ordering heuristic, DLLs are “Required” and all other files are considered “Offline”. This provides the following sorted files:

Required files

FileE

Offline files

FileA, FileB, FileC, File D

Step 1302 sorts files based on scenario priorities (from highest to lowest). Higher priority files are ordered so that they are downloaded first. This step provides the following sorted files:

Required files

FileE

Offline files

Priority 80 group: files used by Scenarios 1 & 2 = File A, File B, and File C

Priority 40 group: files used by Scenario 3 (that are not already listed) = File D.

Step 1304 then sorts the files by file usage order within a scenario run. For each priority grouping with more than one file, the files are sorted according to the average order in which they were downloaded within scenarios of their labeled priority. Scenarios with a smaller average usage order will be downloaded earlier. Ties are broken based on the order in which the scenarios appear in the input file. As an example, consider the following:

File A: average order = (Scenario 1 order + Scenario 2 order)/2 = (1+2)/2 = 1.5.

File B: average order = (Scenario 1 order)/1 = (2)/1 = 2.

File C: average order = (Scenario 2 order)/1 = (1)/1 = 1.

Here, file A got used first by scenario 1 and second by scenario 2 for an average of 1.5, and so on. File C has the smallest order number so, of the Offline files, it is sent first. The final file order is shown below:

Required files

FileE

Offline files

FileC, FileA, FileB, File D

Code, Components and “bits”

The following files and resources can be, but need not be included with an extension. This list is not exclusive, as other resources can certainly be incorporated into an extension.

- Customized UI and keyboard shortcuts
- Components and Behaviors
- XML browsing and editing components (including XSL and business logic objects)
- Static pages or other resources
- Third-party defined custom content

Users install extensions by navigating to a network site for the extension. In an Internet implementation, the user navigates to an appropriate URL for the extension. Hosting administrators can also “push” extensions so that users can

1 automatically receive them by adding an entry into the appropriate users'
2 "Preference" settings.

3 4 **Platform Set Up and Extension Installation**

5 Fig. 14 is a flow diagram that describes exemplary steps in a set up and
6 extension installation process in accordance with the described embodiment. This
7 example describes an Internet-based example. In the illustrated example, various
8 extensions are maintained at or accessible through various Internet sites. The
9 extensions are deliverable via the Internet to a client. It will be appreciated that
10 the illustrated division of computers may not necessarily exist at all. For example,
11 all of the functionality embodied by the computers may reside on one machine, or
12 the extension may be local, or the platform and the extensions may be on the same
13 machine, etc.

14 The flow diagram, in this example, is illustrated in connection with three
15 separate "zones", one of which represents a client, one of which represents a
16 "platform" Internet server, and one of which represents a third party Internet
17 server. The acts that are described in connection with the different zones are
18 performed, in this example, by the entities assigned to the zone. In some
19 configurations, one or more of these zones may overlap. For instance, the
20 platform server may be the same device as the extension server.

21 Step 1400 navigates a user to a particular Internet site that is associated
22 with the software platform that is to be utilized as the foundation for extension
23 installation described below. In step 1402, the user clicks an "install" button that
24 sends a message to the software platform server that indicates that a user wishes to
25 install the software platform. This step can be an optional step. Steps 1404 and

1 1405 then download the software associated with the software platform to the
2 client. In the illustrated example, step 1404 downloads the package file for the
3 single navigable window application and based on that file's contents step 1405
4 downloads other components and files to the user's computer. Step 1406 installs
5 the software code on the client machine and can create local directories for the
6 application cache, a local store and preferences. It will be appreciated, however,
7 that local directories or preferences are not necessarily needed. Step 1408
8 launches the software platform.

9 The steps described immediately above constitute steps associated with an
10 initial set up in which the software code for the single navigable window
11 application is delivered to and installed on a client machine. The steps described
12 immediately below are associated with extension installation.

13 Step 1410 uses a link that is associated with an extension to access the
14 extension. This step can be implemented by a user navigating their browser to a
15 particular Internet site through which one or more extensions can be accessed.
16 Alternately, a reference to the link can be placed in the user's preferences or the
17 preferences of a computing group with which the user is associated (e.g. the
18 system administrator can place a reference in a group's preferences). The link can
19 advantageously be associated with a third party Internet server or Internet site.
20 Step 1412 downloads extension files according to the PKG associated with an
21 EDF. The files are delivered to the client and step 1414 places the extension files
22 in a local store as specified by the PKG specification. At this point, an extension
23 is installed and the user can utilize the functionality provided by the extension.
24 Step 1416 determines whether extension updates are available. This can be done
25 by periodically polling an extension catalog (discussed in an "Extension Catalog"

section below) to ascertain whether there are any updates to various extensions. Alternately, notifications might be automatically sent to the client so that the client is aware of updates or any other method might be used to determine if updates are available. If there are updates available, step 1418 branches to step 1412 which downloads the extension files associated with the update and installs them on the client.

Developing Extensions

Developing extensions for the software platform is a fairly straight-forward process. A developer develops the extension content using a tool such as Notepad or other tools such as Visual Studio. The extension is then described in an EDF and PKG and the PKG is digitally-signed and then optionally compressed. The extension can then be hosted on a particular network server.

Fig. 15 is a flow diagram that describes steps in an extension development method in accordance with the described embodiment. One or more of these steps can be performed by a software developer or organization that creates a particular extension. Some of the steps are implemented in software. Step 1500 develops an extension. Any suitable tools can be used to develop the extension. Step 1502 then creates an extension definition file (EDF) for the extension. The EDF, in this example, is defined using XML as discussed above. Other formats can, of course, be used to describe the EDF. Step 1504 creates a package manifest (PKG) for the extension. The PKG, in this example, is defined using XML as discussed above. Step 1506 then hosts the EDF and PKG on a network server such as an Internet server. Additionally, the associated extension files that are described in the PKG can also be hosted by the network or Internet server (step 1508). Having

accomplished the above, users can now navigate to an EDF directly (using, for example, the associated URL or some other network address), which then installs the extension by caching any required files locally and placing a reference to the extension in the user's preferences.

Specifically, step 1510 delivers the EDF and PKG files to a client. This step can be implemented by a user navigating to a particular Internet site where the appropriate files are hosted and then downloading the files. Step 1512 delivers the extension files that are associated with the EDF and PKG files to the client, whereupon they can be installed and used.

Extension Catalog

One optimization, discussed briefly in connection with Fig. 14, is an extension or EDF catalog which provides an additional level of indirection to the EDF. An EDF catalog allows organizations to group extensions and provides a single place to determine when an extension changes. The desired extension can be automatically selected from the catalog by the software platform based upon the user's settings. The catalog can be queried to determine which extension is most appropriate for the user.

In the described embodiment, a catalog is an XML file that contains mappings from extension URNs to one or more package URNs based upon language, version or other attributes. Catalogs can, however, be defined using any suitable format. Catalogs can provide:

- The ability for a hosting organization to update version information for one or more hosted extensions in a single place

- Optional automatic indirection to correct version based upon user's settings. For instance, a catalog may list several versions of an extension for different languages. The catalog file can be processed to find the version of the extension that matches the user's language settings.
- Optional automatic upgrade to new versions of extensions as they become available

Like EDFs, catalogs can be compressed and digitally signed to prevent tampering. By subscribing to a catalog in order to detect changes for one or more hosted extensions, the number of server pings required from the client (or notifications to the client) in order to discover extension updates can be reduced.

Fig. 16 shows an exemplary XML catalog structure. Entries in the catalog can be structured as follows:

Attribute	Type	Required	Description
extensionURN	uri	Y	Identifier for an extension. There may be more than one entry for a given extension urn in a single catalog representing different versions, languages, etc.
name	String	N	Friendly name for an extension.
packageURN	uri	Y	Required urn for the package. Package urn corresponds to a discrete set of bits. It is different from the extension urn: For each user, the extension urn (name) corresponds to a specific set of files based upon language preferences and version. This means that, for shared machines, different users may have different extensionURN to packageURN maps based

			upon their preferences.
packageURL	uri	Y	url of the digitally signed compressed file containing the PKG file is required.
language	String	N	Language is an optional language specifier.
version	String	N	Version is an optional version specifier
defaultLanguage	String	N	DefaultLanguage is an optional attribute specifying the default language package. For a given version of an extension, there should be only one entry with DefaultLanguage attribute.
defaultVersion	String	N	DefaultVersion is an optional attribute specifying default version for an extension. For a given extension urn and language attribute there should be only one entry with DefaultVersion attribute.

In this particular example:

- The default language of the netdocs-planner is the English version.
- The default English version is 1.1. The default French version is 1.0. If there is no version available in the user's specified language on the platform, they will get the English version 1.1 by default.
- The English version of netdocs-planner has been upgraded from V1 to V1.1.
- There is also a French version. The extension URN is the same as the English version. There is no 1.1 release for French yet, so 1.0 is the current version for French speaking users.
- A query against the catalog returns only the rows where language matches the user's language preferences. The query would also return all rows where language is the user's language or default = 'yes' and throw out duplicates for the same name.

Architecture

In the described embodiment, one of the aspects that provide desirable utility is the extensibility of the software platform. That is, third and fourth party developers are free to develop their own extensions which can then be used within the framework of the software platform. The extensions are integrated directly into the software so that the platform's functionality is modified by the extensions. Recall that in order to provide an extension, the developer simply authors the extension, describes their extension in an EDF and PKG, and then hosts the EDF, PKG, and associated files on a network server.

The EDF, as pointed out above, can be defined in an XML schema that includes a root node (i.e. the "extension" tag) and one or more child nodes. In this particular example, the child nodes generally correspond to the individual extension feature types that are desired for incorporation into the software platform. For example, recall that Tables 1-3 above describe various exemplary predefined feature types that can be added through an extension using the predefined XML schema.

Consider now a developer who wants to add two menus and a toolbar to the software platform. The menus and toolbar might be associated with a retail store that maintains a Web site for its customers. The retail store might want a customer who visits its Web site to be presented with a UI that is unique to the retail store and provides services that are specifically tailored to the store. To do this, the developer develops two different menus, one of which might be associated with displaying the most recent specials, and other of which might be associated with providing a search mechanism through which the user can search for specific products. The toolbar might contain specific buttons that are unique to the retail

store. A simplified EDF called “*retail.edf*” for the retail store’s extension is shown directly below:

```
<edf:extension name= “retail extension” urn= “extension.retail.com”>
  <edf:menus>
    <edf:menu url= “url1.htm”/>
    <edf:menu url= “url2.htm”/>
  </edf:menus>
  <edf:toolbars>
    <edf:toolbar url= “url3.htm”/>
  </edf:toolbars>
</edf:/extension>
```

Here, the outer “extension” tag designates this XML file as an extension. The inner “menus” and “toolbars” tags are top level tags that designate that the information between these tags pertains respectively to menus and toolbars that correspond to the extensions that the developer has added. The boldface “menu” and “toolbar” tags describe data pertaining to the actual extension and contain a URL that is associated with each extension as described above. The EDF above logically describes the extensions that are being provided as including two menus and one tool bar.

Consider also that the above EDF can constitute but one of many EDFs that are loaded into the system. Each EDF can contain one or more top level tags, each of which is associated with one or more specific extensions that are to be added to the software platform.

Fig. 17 is a block diagram of an exemplary software architecture that is configured to process multiple different EDFs so that the software components that are responsible for incorporating each particular extension into the software

1 platform receive the appropriate information that is specific to their extension.
2 This example is specific to the XML implementation that is discussed throughout
3 this document. It is to be understood that other architectures, similar in
4 functionality to the one discussed below, can be used in other implementations
5 without departing from the spirit and scope of the claimed subject matter.

6 Utility objects, herein referred to as attachment points, are used to process
7 the information from the multiple EDFs. An attachment point is simply a
8 collection of objects that fire events to registered listeners as objects are added to
9 or removed from the collection. Many types of attachment points can be created,
10 but all take data from a source (often another attachment point), process it (either
11 dynamically or statically), and expose the results of their processing. Some of the
12 simplest attachment points include:

- 13 • An XML attachment point, which loads an XML file and exposes
the top-level nodes of the XML as objects in its collection.
- 14 • A filter attachment point, that connects to another attachment point
and exposes only those objects from it that meet some criteria.
- 15 • A merge attachment point, that connects to one or more other
16 attachment points and exposes all of their objects as one, merged
collection of objects.

17 In the illustrated example, the architecture includes a collection of one or
18 more attachment points, including a funnel structure known as an EDFHub 1700,
19 an attachment point manager 1702, and multiple attachment managers 1704. The
20 EDFHub 1700 receives all of the EDFs and merges them together and exposes
21 them as a single list. Other individual attachment points provide mechanisms that
22 manipulate (including filter, merge and expand) the single list that is exposed by
23 the EDFHub 1700. Whenever a new extension or EDF is added to or removed
24 from the EDFHub, the various attachment points will see to it that the appropriate
25 attachment manager(s) is notified. This is done by firing events to the appropriate

1 attachment managers. The attachment point manager 1702 creates, destroys and
2 manages the various attachment points in the system and allows easy reuse of
3 identical attachment points.

4 For each top level tag (i.e. "menus" and "toolbars" tags), there is a
5 corresponding attachment manager 1704 that uses data provided by the attachment
6 points to incorporate a particular type of feature within the software platform.
7 Each attachment manager requests a set of attachment points from the attachment
8 point manager 1702. These manipulate the data exposed by the EDFHub 1700. In
9 the illustrated example, the attachment points can be requested as a predicate chain
10 that the attachment point manager uses to create and build a set of attachment
11 points that operate on the data exposed by the EDFHub 1700.

12 Fig. 18 is a flow diagram that describes steps in a method in accordance
13 with the described embodiment. The method is implemented in software and, in
14 this example, by the software components of Fig. 17.

15 Step 1800 receives multiple EDFs. These files can be received in any
16 suitable way. For example, a user can specify in their preferences particular
17 extensions that they desire to be loaded when they are online. Alternately, a user
18 might navigate using a link to a particular Internet site that recognizes that the user
19 is executing a software platform that is configured to dynamically add the
20 extensions. The EDFs, in this example, are funneled into the EDFHub 1700 which
21 uses attachment points to combine the EDFs (step 1802). In this example, the
22 EDFs are defined as XML files and the nodes are combined into one single XML
23 list. Step 1804 exposes the combined EDFs. In this particular example, the EDFs
24 are combined into a single XML list that is exposed to other various attachment
25 points which then further manipulate that data (step 1806). One goal of the

attachment points is to avoid having the attachment managers 1704 re-query the whole system every time an extension gets added or removed from the system. Thus, if an extension gets added or removed, the attachment points ensure that only the appropriate attachment manager 1704 is notified of the specific additions or deletions of the extension. For example, if an EDF indicates the addition of a menu, then only the attachment manager associated with menus is notified. Accordingly, step 1808 notifies the appropriate attachment manager of any new data that matches the attachment managers requirements.

Attachment Points and the Attachment Point Manager

Attachment points are objects that expose collections of ordered objects and fire notifications when new objects are inserted or deleted. In the exemplary system, the objects are XML nodes, but they could be any type of object. Although there are many types of attachment points, they all follow a similar process:

- 1) Initially attach to one or more data sources. These could be files or, commonly, other attachment points.
- 2) Process the data based on some logic. Usually the logic is quite simple and could involve something like filtering the objects based on some criteria.
- 3) Expose the results of the processing step 2 in a new collection of objects.
- 4) Fire events to indicate how the exposed collection of objects changed (OnInserted(index, count) or OnRemoved(index, count).
- 5) Optionally, continue to listen for changes in the data sources and repeat step 2-4 when changes occur.

Alone, each attachment point is quite simple, but when different types of attachment points are combined to form “chains”, where one attachment point processes data from a second attachment point, the processing can be quite

powerful. This is especially true if the attachment points only process the changed data in step 2, since they only do a small amount of simple work at any one time. In the exemplary system, this incremental processing means that the whole system does not have to be re-queried when a new extension is installed or when an existing extension is removed. Additionally, each attachment manager in the exemplary system uses a specific chain of attachment points and so is only informed of changes that impact its area of extensibility.

The attachment point manager performs two important functions when building chains of attachment points. First, it allows the chains to be described as predicate strings. The attachment point manager interprets these strings and builds the required chain of attachment points. Second, it allows the reuse of identical attachment points, which makes the system more efficient. As the attachment point manager creates each chain of attachment points, it tracks which predicate string corresponds to which attachment point. If that predicate string is later requested again, it simply reuses the existing attachment point without creating a new one.

As an example, consider that the attachment manager associated with menus has requested the following predicate chain of attachment points that utilizes the *retail.edf* file above: (Note: this example does not assume the presence of an EDFHub attachment point).

$$\text{Explode}(\text{Filter}(\text{"menus"}, \text{Explode}(\text{URL}(\text{"retail.edf"}))))$$

This string represents all of the menus in the *retail.edf* file. The XML file located at *retail.edf* is loaded by the URL attachment point which exposes the root

node of the XML file as the only object in its collection. The inner Explode attachment point uses the URL attachment point as its data source and exposes all of the children of the objects in that source collection. In this case, the children of the root node are the top level XML tags “menu” and “toolbars”. The Filter attachment point uses the Explode attachment point as its data source and filters the exposed objects looking only for the nodes that are “menus”. The outer Explode attachment point uses the Filter attachment point as its data source and exposes all of the children of the filtered menu nodes to provide a list containing the two menus that are added by the extension. Since this particular XML file contained menus that were identified by the attachment points associated with menu attachment manager, that attachment manager is then notified that two menus have been added by an extension.

This process is diagrammatically illustrated in Fig. 19 which shows attachment points 1900, 1902, 1904, and 1906. Each attachment point exposes a list of XML nodes. URL attachment point 1900 takes an input (a URL to an XML file—e.g. *retail.edf*) and exposes a list of XML nodes. This list contains only the root node “<edf:extension>”. Explode attachment point 1902 takes as an input attachment point 1900 and exposes a list of XML nodes which are children of source XML nodes. In this example, the list of XML nodes exposed by attachment point 1902 are the “<menu>” nodes and the “<toolbar>” nodes. The filter attachment point 1904 takes attachment point 1902 as an input and filters on “menu.” It then exposes an XML list having only “<menu>” nodes in it. The explode attachment point 1906 takes attachment point 1904 as an input and exposes a list with the XML nodes that are contained in the “<menu>” nodes—here both of the “<menu>” nodes.

007690-666666

1 Consider additionally that the toolbar attachment manager would request a
2 predicate chain of attachment points which would also use URL attachment point,
3 an Explode attachment point and a filter attachment point 1904 that filters on
4 “toolbars”. Thus, the corresponding explode attachment point 1906 would expose
5 an XML list containing only the “<toolbar>” node. But, the attachment point
6 manager would detect the commonality of the URL attachment point and the inner
7 Explode attachment point, so it would reuse the same attachment points it created
8 for the menu attachment manager. The Filter attachment points used by the
9 toolbar attachment manager and the menu attachment manager would use the
10 same Explode attachment point as their data sources but would expose different
11 collections of nodes, because they were filtering based on different criteria.

12 Consider Fig. 20 which incorporates an EDFHub attachment point 2000.
13 This attachment point receives all of the EDFs and, as discussed above, combines
14 them into a single XML list. The EDFHub then exposes the root nodes of all of
15 the EDFs. The explode attachment point 2002 then exposes an XML list that
16 contains all of the top level nodes for all of the EDFs. As an example, there may
17 be multiple EDFs that each contain top level menu nodes, toolbar nodes,
18 accelerator nodes and the like. Explode attachment point 2002 exposes an XML
19 list that contains all of these top level nodes for all of the EDFs. Filter attachment
20 point 2004 can then filter the XML list exposed by the explode attachment point
21 2002 in accordance with any suitable parameters (i.e. filter on menu nodes, tool
22 bar nodes, accelerator nodes and the like). The final explode attachment point
23 2006 then exposes a list of the individual children nodes of the list exposed by the
24 filter attachment point 2004. This list describes all of the specific features (of the
25 particular type that were filtered) that have been added by all of the EDFs.

The table below lists a number of different attachment points that can be utilized in accordance with this described embodiment but many more can easily be created.

Attachment Point	Purpose
URL	Loads the URL and exposes the top level XML node as a member of the collection
Context	For every member, it gets the "expression" attribute and binds to it. If the expression evaluates to true, then the member is exposed.
EDF	Same as the URL AP, but also exposes a fabricated member with data to create an APP based on the URL and URN (which exists in the XML DOM).
Merge	Takes zero or more Attachment Points (of any type) and merges them together. The order and continuity of the original collections will be maintained.
Filter	Monitors a single Attachment Point and only exposes those nodes that match the specified name. The order of the original collection will be maintained.
Duplicate	Monitors a single Attachment Point and filters out any duplicates. A duplicate is defined to be having the same URN attribute. If no URN attribute is present then the node is exposed. Order of the original collection will be maintained.
Explode	Monitors a single Attachment Point and for every member exposes the children of that member as its members. The order of the original collection will be maintained as well as the order of the children within the nodes.
Link	Monitors a single Attachment Point and for every member looks for a URL attribute and creates a URL AP and

	merges it into itself. If the optional include Content is set to true, it will merge the original collection in as well.
Order	Monitors a single Attachment Point. For every member, it gets three attributes: id, before and after. Based on this information, it reorders the members as specified. If no ordering information is supplied, the order of the original collection will be maintained.
EDFHub	This Attachment Point is the central merge point that represents all the EDF points.

Conclusion

The embodiments described above provide a platform solution that provides for customization and extensibility through a consistent and logical extensibility mechanism and object model that can be easily understood by third party developers. Internet-based downloads can be accomplished without a great deal of user intervention and without manipulating any user persisted settings. Extensions can be provided to a software platform or application program dynamically based upon the user's computing context.

Although the invention has been described in language specific to structural features and/or methodological steps, it is to be understood that the invention defined in the appended claims is not necessarily limited to the specific features or steps described. Rather, the specific features and steps are disclosed as preferred forms of implementing the claimed invention.

1 **CLAIMS**

2 1. A method for delivering software via a network comprising:
3 describing one or more software extensions using a hierarchical language,
4 the extensions being configured for incorporation on a client, said describing
5 defining one or more manifests containing at least one list of files comprising an
6 extension; and

7 delivering the one or more manifests to the client via the network, the one
8 or more manifests being configured for use in downloading the software
9 extensions via the network.

10
11 2. The method of claim 1, wherein the one or more manifests are
12 configured to assist in organizing delivery of individual files listed in the one or
13 more manifests.

14
15 3. The method of claim 1, wherein the one or more manifests are
16 configured to assist in validating individual files listed in the one or more
17 manifests.

18
19 4. The method of claim 1, wherein the one or more manifests are
20 configured to assist in updating individual files listed in the one or more manifests.

21
22 5. The method of claim 1, wherein the one or more manifests describe
23 individual file locations.

1 **6.** The method of claim 1, wherein the one or more manifests contain
2 individual hashes for one or more of the listed files.

3
4 **7.** The method of claim 1, wherein the one or more manifests contain
5 download directives for downloading the listed files.

6
7 **8.** The method of claim 1, wherein the one or more manifests are
8 defined in a tag-based language.

9
10 **9.** The method of claim 1, wherein the one or more manifests are
11 defined in extensible markup language (XML).

12
13 **10.** The method of claim 1, wherein the network comprises the Internet.

14
15 **11.** One or more computer-readable media comprising computer-
16 readable instructions thereon which, when executed by a computer, cause the
17 computer to implement the method of claim 1.

18
19 **12.** A computer programmed with instructions which, when executed by
20 the computer, implemented the method of claim 1.

1 **13.** One or more computer-readable media comprising computer-
2 readable instructions thereon which, when executed by a computer, cause the
3 computer to:

4 describe one or more software extensions using extensible markup
5 language (XML), the extensions being configured for incorporation on a client,
6 said describing defining a manifest containing at least one list of files comprising
7 an extension, the manifest being configured to assist in one or more of the
8 following: organizing delivery of individual files listed in the manifest, validating
9 individual files listed in the manifest, and updating individual files listed in the
10 manifest; and

11 deliver the manifest to the client via the network.

12
13 **14.** A method for receiving software via a network comprising:

14 receiving a manifest that contains at least one list of files comprising a
15 software extension that is to be downloaded via a network and incorporated on a
16 client, the manifest being defined in extensible markup language (XML), the
17 manifest being configured to assist in:

18 organizing delivery of the files,
19 validating individual files listed in the manifest, and
20 updating individual files listed in the manifest; and
21 downloading files from the list of files contained in the manifest.

22
23 **15.** The method of claim 14, wherein the software extension is to be
24 incorporated into a software platform executing on the client.
25

1 **16.** The method of claim 14, wherein the downloading of the files takes
2 place by downloading the files in an order that is described in the manifest.

3
4 **17.** The method of claim 14 further comprising validating one or more
5 downloaded files using the manifest.

6
7 **18.** The method of claim 14 further comprising updating one or more
8 files using the manifest.

9
10 **19.** One or more computer-readable media comprising computer-
11 readable instructions thereon which, when executed by a computer, cause the
12 computer to implement the method of claim 14.

13
14 **20.** A computer programmed with instructions which, when executed by
15 the computer, implement the method of claim 14.

16
17 **21.** A data structure embodied on a computer-readable medium and
18 configured to assist in delivering software extensions via the Internet, the data
19 structure comprising:

20 a list of one or more files that are utilized in a software extension that is
21 configured to extend a software application executing on a client;

22 one or more hashes each of which being associated with a particular listed
23 file; and

24
25

1 one or more file groups, individual files being associated with individual
2 file groups, the file groups determining when particular files of the extension get
3 downloaded to the client.

4
5 **22.** The data structure of claim 21, wherein the file groups determine
6 where files are stored on the client.

7
8 **23.** The data structure of claim 21, wherein the file groups determine
9 how files are packaged for delivery.

10
11 **24.** The data structure of claim 21, wherein the file groups determine
12 where files are stored on the client and how files are packaged for delivery.

13
14 **25.** The data structure of claim 21, wherein the file groups identify files
15 that are to be downloaded before any other files.

16
17 **26.** The data structure of claim 21, wherein the file groups identify files
18 that are to be downloaded for offline use.

19
20 **27.** The data structure of claim 21, wherein the file groups identify files
21 that are only downloaded when they are required for the first time by a user.

1 **28.** The data structure of claim 21, wherein the file groups identify files
2 that are downloaded on demand and provide content that is available only when a
3 user is online.

4
5 **29.** The data structure of claim 21, wherein the file groups indicate file
6 download priority.

7
8 **30.** The data structure of claim 21, wherein the one or more hashes are
9 used for security.

10
11 **31.** The data structure of claim 21, wherein the one or more hashes are
12 used for versioning.

13
14 **32.** The data structure of claim 21, further comprising a storage size that
15 is associated with an amount of storage required by the extension.

16
17 **33.** The data structure of claim 21, further comprising one or more class
18 identifiers for individual dynamic link libraries (DLLs).

19
20 **34.** The data structure of claim 21, further comprising one or more
21 dynamic link library (DLL) load dependencies.

22
23 **35.** The data structure of claim 21, further comprising:
24 a storage size that is associated with an amount of storage required by the
25 extension;

1 one or more class identifiers for individual dynamic link libraries (DLLs);
2 and
3 one or more dynamic link library (DLL) load dependencies.
4

5 **36.** The data structure of claim 21 embodied as an extensible markup
6 language (XML) file.
7

8 **37.** A method of providing software via a network comprising:
9 describing one or more software extensions using one or more extensible
10 markup language (XML) files, the extensions being configured for incorporation
11 in a software program executing on a client, individual XML files providing
12 individual manifests that contain a list of files that comprise an extension; and
13 storing the XML files in a Web-accessible location.
14

15 **38.** The method of claim 37 further comprising storing extension files
16 associated with the XML files in a Web-accessible location.
17

18 **39.** The method of claim 37 further comprising:
19 storing extension files associated with the XML files in a Web-accessible
20 location; and
21 providing one or more XML files and one or more associated extension
22 files to a client via the network.
23
24
25

1 **40.** The method of claim 37, wherein individual manifests can contain
2 one or more file hashes that can be used for file security.

3
4 **41.** The method of claim 37, wherein individual manifests can contain
5 one or more file hashes that can be used for versioning.

6
7 **42.** The method of claim 37, wherein individual manifests comprise one
8 or more file groups that determine when particular files are downloaded to the
9 client.

10
11 **43.** The method of claim 42, wherein the file groups determine where
12 files are stored on the client.

13
14 **44.** The method of claim 42, wherein the file groups determine how files
15 are packaged.

16
17 **45.** The method of claim 42, wherein the file groups determine where
18 files are stored on the client and how files are packaged.

19
20 **46.** One or more computer-readable media having computer-readable
21 instructions thereon which, when executed by a computer, cause the computer to
22 implement the method of claim 37.

1 **47.** A security method for downloading software extensions via the
2 Internet comprising:

3 receiving, via the Internet, a package manifest containing a list of multiple
4 files that comprise a software extension that is to be incorporated into an
5 application program executing on a client, the list containing a hash for one or
6 more of the files comprising the software extension;

7 receiving, via the Internet, the multiple files that are described in the
8 package manifest;

9 creating a hash for one or more of the multiple received files; and
10 comparing the created hash of the one or more files with corresponding file
11 hashes contained in the package manifest to ascertain whether one or more of the
12 received file is secure.

13
14 **48.** The security method of claim 47, wherein the package manifest
15 comprises an XML file.

16
17 **49.** One or more computer-readable media comprising computer-
18 readable instructions thereon which, when executed by a computer, cause the
19 computer to implement the method of claim 47.

20
21 **50.** One or more client computers programmed with instructions which,
22 when executed by the one or more computers, cause the one or more computers to
23 implement the method of claim 47.

1 **51.** An updating method for updating software extensions via the
2 Internet comprising:

3 receiving, via the Internet, a package manifest containing a list of multiple
4 files that comprise a newer version of a software extension that is to be
5 incorporated into an application program executing on a client that contains an
6 older software extension version, the list containing a hash for one or more of the
7 files comprising the newer version of the software extension;

8 comparing one or more hashes that are received with one or more hashes of
9 files from the older version of the software extension;

10 for any hashes of corresponding files from the different versions that are
11 different, downloading a new file from a web server; and

12 for any hashes of corresponding files from the different versions that are the
13 same, copying a file from an old local directory on the client to a new local
14 directory on the client associated with the newer version of the extension.

15
16 **52.** The updating method of claim 51, wherein the package manifest
17 comprises an XML file.

18
19 **53.** One or more computer-readable media comprising computer-
20 readable instructions thereon which, when executed by a computer, cause the
21 computer to implement the method of claim 51.

1 **54.** One or more client computers programmed with instructions which,
2 when executed by the one or more computers, cause the one or more computers to
3 implement the method of claim 51.

4
5 **55.** A data structure embodied on a computer-readable medium
6 comprising:

7 one or more first tags indicative of associated file groups associated with an
8 Internet-downloadable software extension that can extend an application program
9 executing on a client; and

10 one or more second tags indicative of specific files that comprise the
11 software extension.

12
13 **56.** The data structure of claim 55, wherein the one or more second tags
14 can contain hashes for individual files.

15
16 **57.** The data structure of claim 55 further comprising one or more third
17 tags indicative of file load dependencies.

18
19 **58.** The data structure of claim 55 further comprising one or more third
20 tags indicative of COMClass IDs.

21
22 **59.** The data structure of claim 55 further comprising:

23 one or more third tags indicative of file load dependencies; and

24 one or more fourth tags indicative of COMClass IDs.
25

1 **60.** The data structure of claim 55, wherein the ordering of the file
2 groups implicitly defines a download order of the files.

3
4 **61.** The data structure of claim 55, wherein the tags comprise XML
5 tags.

6
7 **62.** A data structure embodied on a computer-readable medium
8 comprising:

9 a list of files from an extension package that have been downloaded to a
10 client;

11 a URL of a package manifest on a code server; and

12 a URN for a package destination directory in a package cache at the client.

13
14 **63.** The data structure of claim 62 further comprising a URN for an old
15 package directory in the package cache at the client.

16
17 **64.** A queue management method comprising:

18 defining a download queue that controls when files are to be downloaded to
19 a client, the files pertaining to a software extension that is to be incorporated into
20 an application program executing on the client;

21 ascertaining whether a user action at the client requires one or more files
22 that are not currently being downloaded; and

23 manipulating the download queue responsive to a user action that requires
24 one or more files that are not currently being downloaded so that the one or more
25 required files are downloaded sooner than they would otherwise be.

1
2 **65.** The queue management method of claim 64, wherein the download
3 queue contains multiple package objects each of which contains a list of one or
4 more files that correspond to a software extension, and said manipulating
5 comprises moving a package object to the head of the download queue.

6
7 **66.** The queue management method of claim 65, wherein said
8 ascertaining comprises determining whether a required file is associated with a
9 package object whose files are currently being downloaded.

10
11 **67.** The queue management method of claim 65, wherein said
12 manipulating comprises:

13 ascertaining an identifier associated with a requested file; and

14 locating a package object with a corresponding identifier.

15
16 **68.** One or more computer-readable media comprising computer-
17 readable instructions thereon which, when executed by a computer, cause the
18 computer to implement the method of claim 64.

19
20 **69.** A method of creating software packages for delivery via the Internet
21 comprising:

22 identifying end user features;

23 identifying shared dependencies between the end user features;

24 creating individual software packages for the end user features;

25 creating individual software packages for the shared dependencies; and

1 hosting the software packages on a web server.

2
3 **70.** The method of claim 69, wherein the packages comprise one or
4 more files that are associated with a single application program that provides
5 multiple different functionalities, and the packages extend, in some way, the
6 functionalities that are provided by the single application program.

7
8 **71.** An automated software tool comprising a package manifest creation
9 tool configured to:

10 receive one or more input parameters pertaining to a package manifest that
11 is to describe a software extension that is configured to extend a software
12 application executing on a client; and

13 generate a package manifest that describes the extension, the package
14 manifest being generated using a hierarchical language.

15
16 **72.** The automated software tool of claim 71, wherein the hierarchical
17 language comprises a tag-based language.

18
19 **73.** The automated software tool of claim 71, wherein the hierarchical
20 language comprises extensible markup language (XML).

21
22 **74.** The automated software tool of claim 71, wherein one input
23 parameter specifies a directory containing files that are to be described in the
24 package manifest.

25

1 **75.** The automated software tool of claim 71, wherein one input
2 parameter comprises file group information and load dependencies.

3
4 **76.** The automated software tool of claim 71, wherein one input
5 parameter comprises file usage statistics.

6
7 **77.** The automated software tool of claim 76, wherein the file usage
8 statistics are ascertained from scenario runs.

9
10 **78.** The automated software tool of claim 77, wherein individual
11 scenarios have individual priorities.

12
13 **79.** The automated software tool of claim 76, wherein the file usage
14 statistics are ascertained from scenario runs that are collected by running logs on
15 various scenarios.

16
17 **80.** The automated software tool of claim 76, wherein the file usage
18 statistics are ascertained from scenario runs that are collected by running logs on
19 various scenarios, the scenarios having individual checkpoints that separate one
20 scenario from another.

21
22 **81.** The automated software tool of claim 76, wherein the file usage
23 statistics are ascertaining dynamically by building a knowledge base that describes
24 tasks that users typically accomplish.
25

1 **82.** A method for creating a package manifest comprising:
2 receiving information pertaining to one or more extension directories that
3 contain files that comprise a software extension that is to be incorporated into a
4 software application program to extend the application program;
5 receiving, if any, information pertaining to file groups or load
6 dependencies;
7 receiving, if any, information pertaining to file usage statistics; and
8 generating a package manifest based on the received information.

9
10 **83.** The method of claim 82, wherein the package manifest is generated
11 in XML.

12
13 **84.** The method of claim 82, wherein the file usage statistics can be
14 provided based upon scenario runs.

15
16 **85.** One or more computer-readable media having computer-readable
17 instructions thereon which, when executed by a computer, cause the computer to
18 implement the method of claim 82.

19
20 **86.** A method of providing software extensions via the Internet
21 comprising:

22 assigning one or more files to one or more scenarios to provide multiple
23 different scenarios that describe ways that a user interacts with a software
24 application program;

25 assigning a priority to each of the scenarios;

1 sorting multiple files in accordance with their scenario priority or priorities;
2 and
3 downloading sorted files in an order defined by said sorting.
4

5 **87.** The method of claim 86 further comprising sorting the multiple files
6 in accordance with one or more file groups.
7

8 **88.** The method of claim 86 further comprising sorting the multiple files
9 in accordance with a file usage order within one or more scenarios.
10

11 **89.** The method of claim 86 further comprising:
12 sorting the multiple files in accordance with one or more file groups; and
13 sorting the multiple files in accordance with a file usage order within one or
14 more scenarios.
15

16 **90.** One or more computer-readable media having computer-readable
17 instructions thereon which, when executed by a computer, cause the computer to
18 implement the method of claim 86.
19

20 **91.** A method of ordering files for download to a client comprising:
21 sorting multiple files by one or more file groups;
22 sorting the multiple files based on scenario priority of one or more
23 scenarios into which each file can be placed;
24 sorting the multiple files by file usage order within one or more scenarios.
25

1 **92.** The method of claim 91 further comprising determining a file group
2 from a manifest defined in XML.

3
4 **93.** The method of claim 91 further comprising if no file group
5 information is provided, assuming that all files of a particular type are of a higher
6 priority than other files of different types.

7
8 **94.** The method of claim 91, wherein said sorting by file usage order
9 comprises sorting the files according to the average order in which the files were
10 downloaded within their particular priority or priorities.

11
12 **95.** One or more computer-readable media having computer-readable
13 instructions thereon which, when executed by a computer, cause the computer to
14 implement the method of claim 91.

15
16 **96.** One or more server computers programmed with instructions which,
17 when executed by the one or more server computers, cause the one or more server
18 computers to implement the method of claim 91.

1 **ABSTRACT**

2 Methods and systems for network-based or Internet-based software delivery
3 are described. In one embodiment, an application program or software platform
4 resides on a client. The program or platform is configured so that it is extensible
5 based on software extensions that are deliverable over a network such as the
6 Internet. Various extensions can be developed by third party developers for
7 incorporation into the program or platform. In the described embodiment,
8 extension files that comprise a software extension are hosted on an Internet server.
9 Additional files are also hosted on the Internet server and describe aspects of the
10 software extension. These additional files include files that describe a logical
11 attachment of the extension to the program or platform, as well as files that
12 describe the location of the extension files. Extensions are incorporated on a client
13 by navigating to a particular Internet site through which the extensions can be
14 accessed. The files describing the extension files are downloaded on the client.
15 These files tell the client where the particular extension is to be plugged in, as well
16 as where to find the appropriate extension files and how to download them. The
17 extension files are then downloaded and incorporated into the program or
18 platform.

19
20
21
22
23
24
25

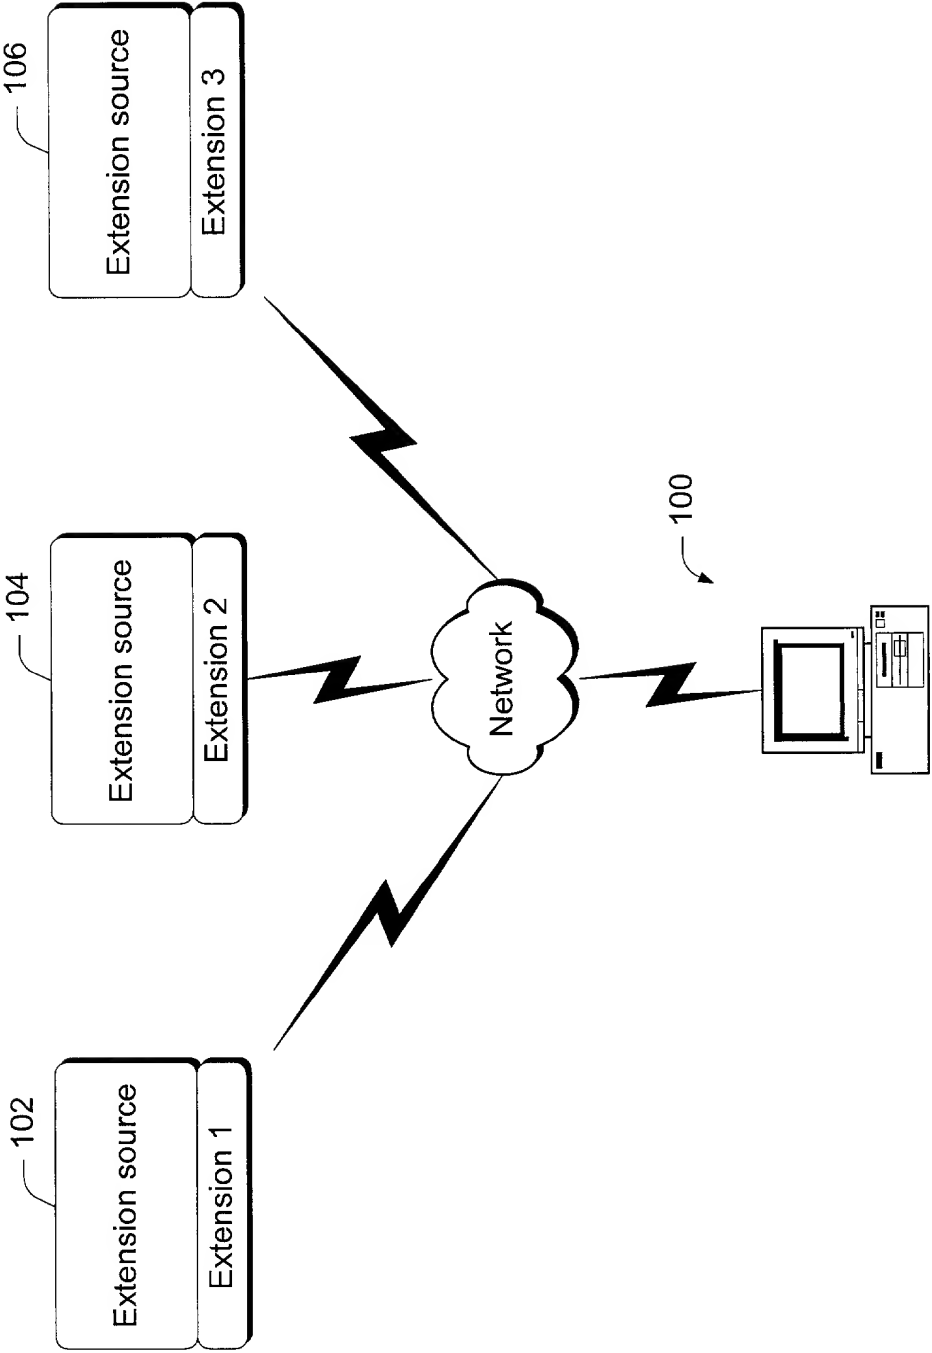
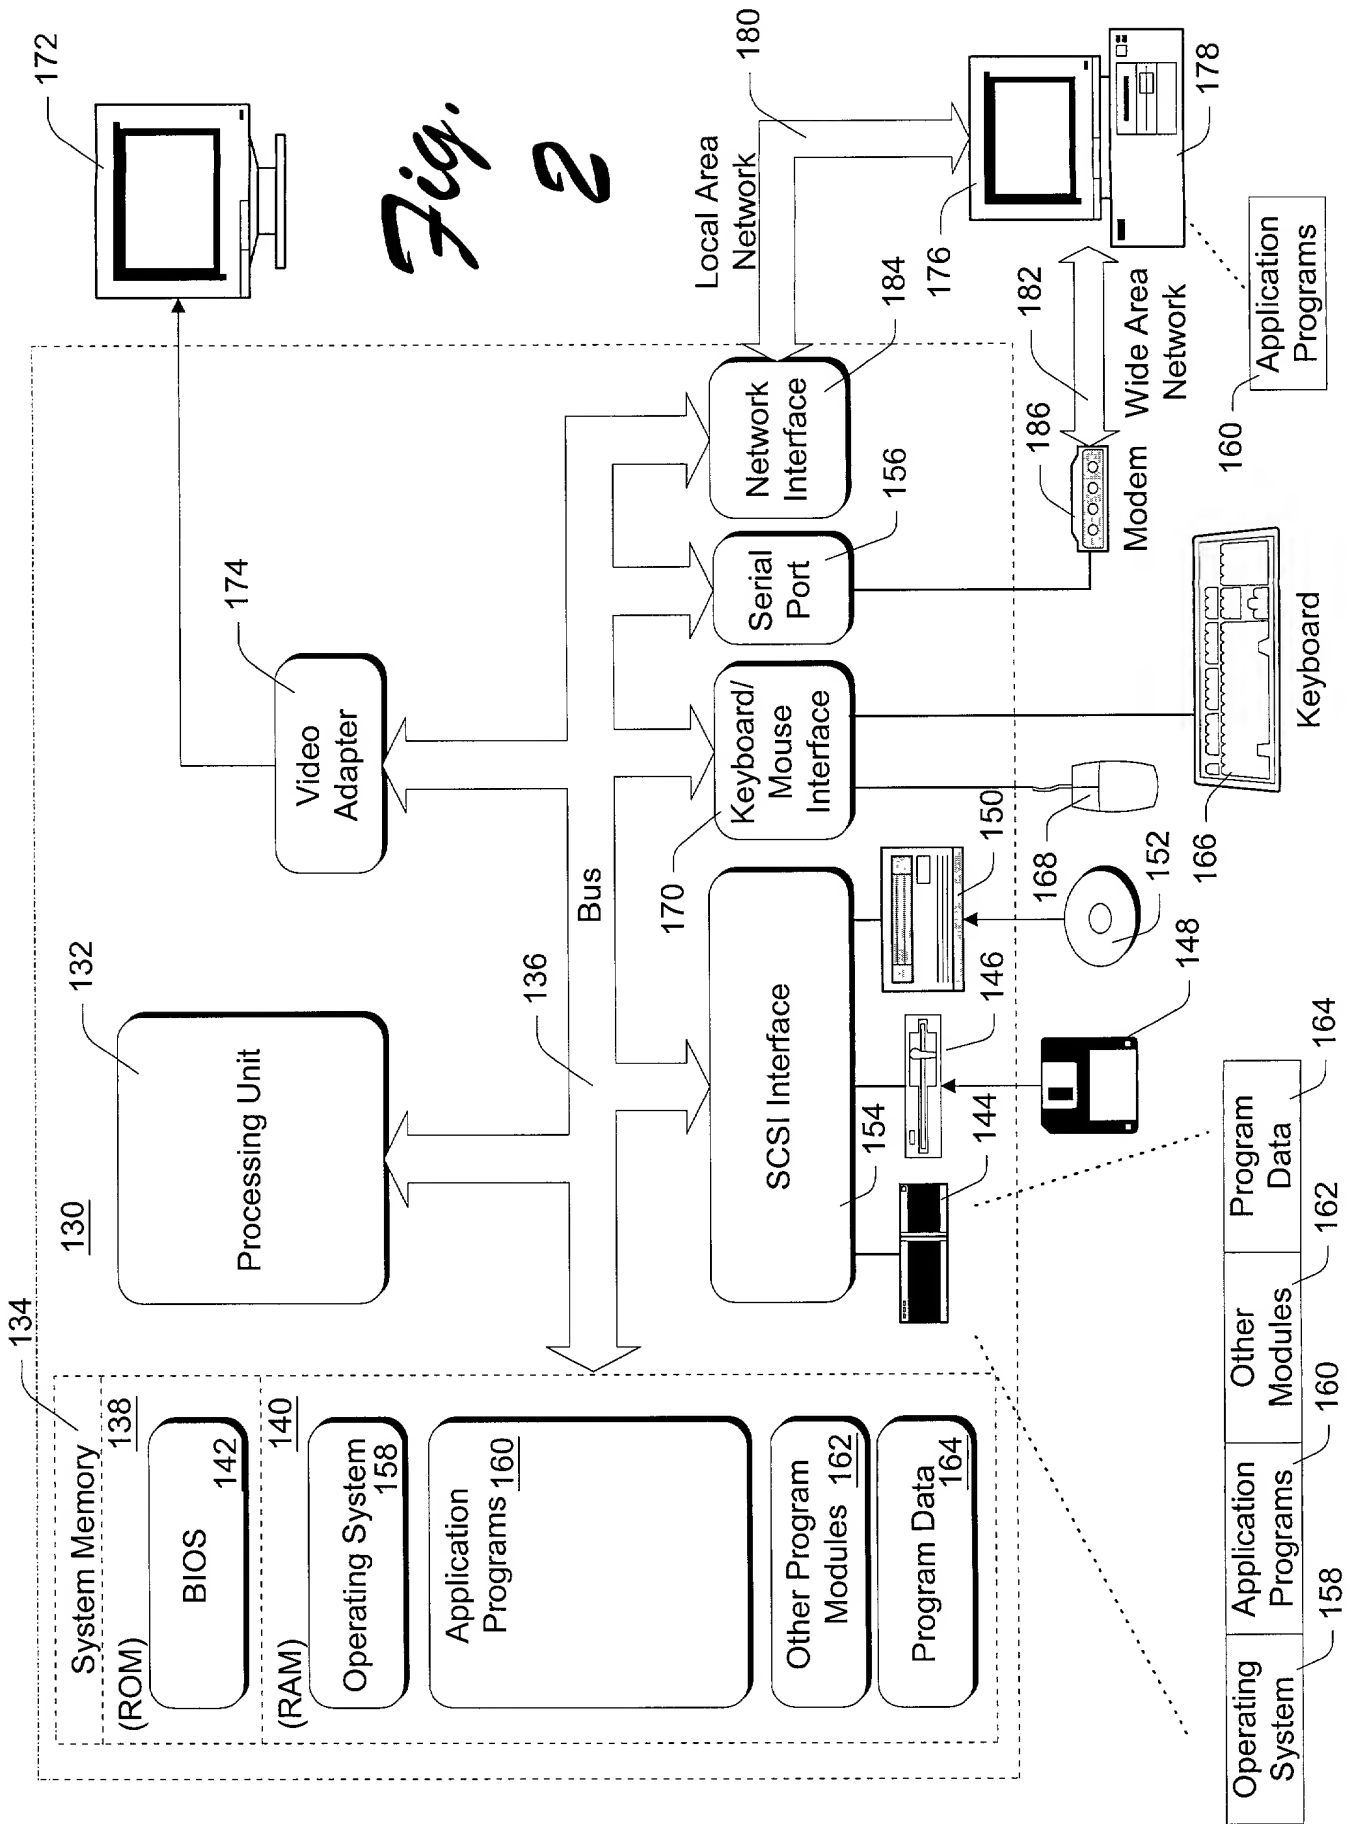


Fig. 1

001230-000000

Fig. 2



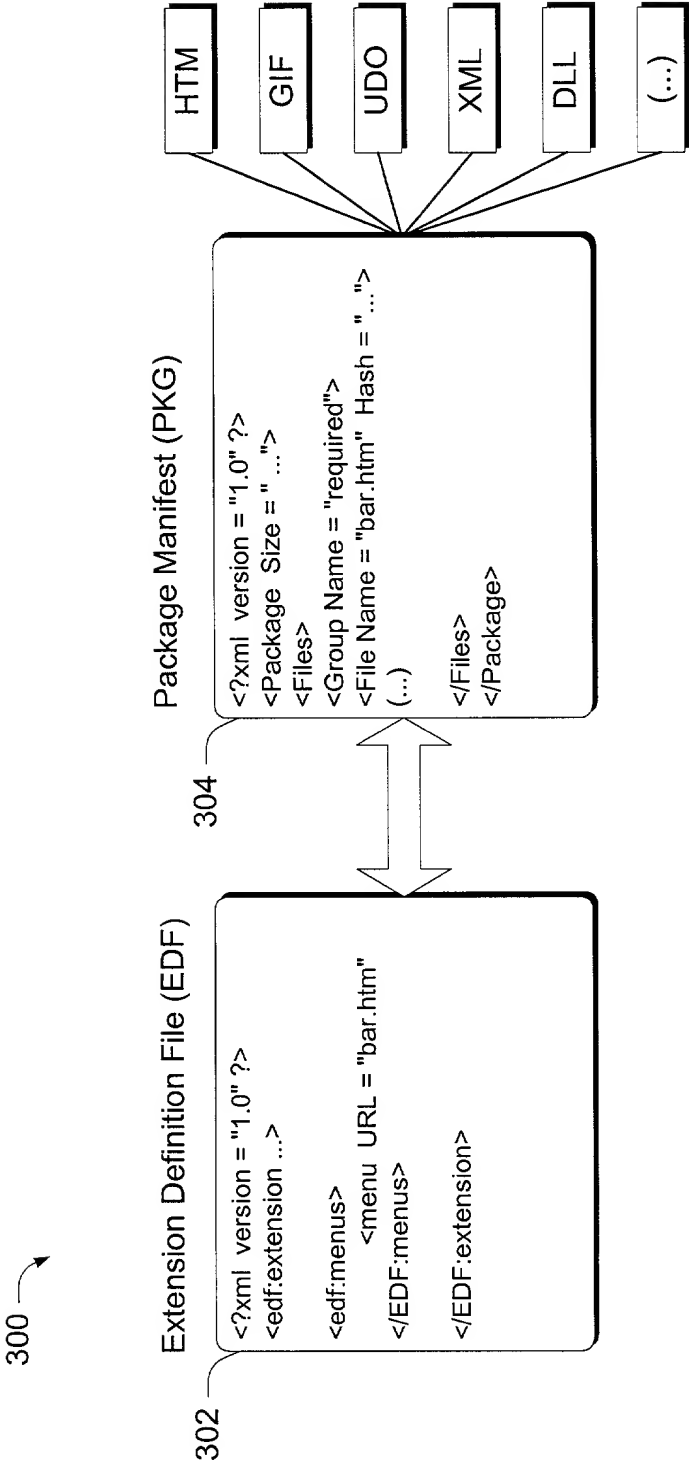


Fig. 3

Extension Tag

```
<EDF:Extension
xmlns:EDF = "urn:schemas-microsoft-com:netdocs_edf.v1"
URN = "urn:HelloNetDocs.netdocs.com"
Name = "HelloNetDocs"
Version = "1.0.0"
LastUpdate = "2000-01-15 8:43:52"
Description = "Hello NetDocs"
>
(...)
</EDF:Extension>
```

Fig. 4

EDF Schema

```
<?xml...>
<!--info about the extensions and linked extensions -->
<edf:extension ...>

    <edf:edfLink ... />

<!--UI extensions -->
    <edf:toolbars> ... </edf:toolbars>
    <edf:accelerators> ... </edf:accelerators>
    <edf:menuItems> ... </edf:menuItems>
    <edf:commandGroups> ... </edf:commandGroups>
    <edf:themes> ... </edf:themes>

<!-- Objects, Components and Behavior Extensions -->
    <edf:Services> ... </edf:Services>

<!-- LocalStore Extensions -->
    <edf:contentClasses> ... </edf:contentClasses>
    <edf:subscriptions> ... </edf:subscriptions>

</edf:extension>
```

Fig. 5

600

Package Manifest

```
<?xml version="1.0"?>  
<Package Size="..." >  
  <Files>  
    <Group Name="required">  
      <File Name="bar.dll" />  
      <File Name="foo.dll" Hash="..." />  
    </Group>  
    <Group Name="dependencies">  
      <File Name="bar.dll" />  
      <Dependencies>  
        <COMClass ClassID="..." />  
      </Dependencies>  
    </Group>  
    <Group Name="myextension.edf">  
      <File Name="myextension.edf" Hash="..." />  
    </Group>  
    <Group Name="errorhandling.gif">  
      <File Name="errorhandling.gif" Hash="..." />  
    </Group>  
    <Group Name="offline">  
      <File Name="bar.xml" Hash="..." />  
      <File Name="abc.gif" Hash="..." />  
      <File Name="xyz.gif" Hash="..." />  
      <File Name="foo.htm" Hash="..." />  
    </Group>  
    <Group Name="ondemand">  
      <File Name="foo2.htm" Hash="..." />  
    </Group>  
  </Files>  
</Package>
```

Fig. 6

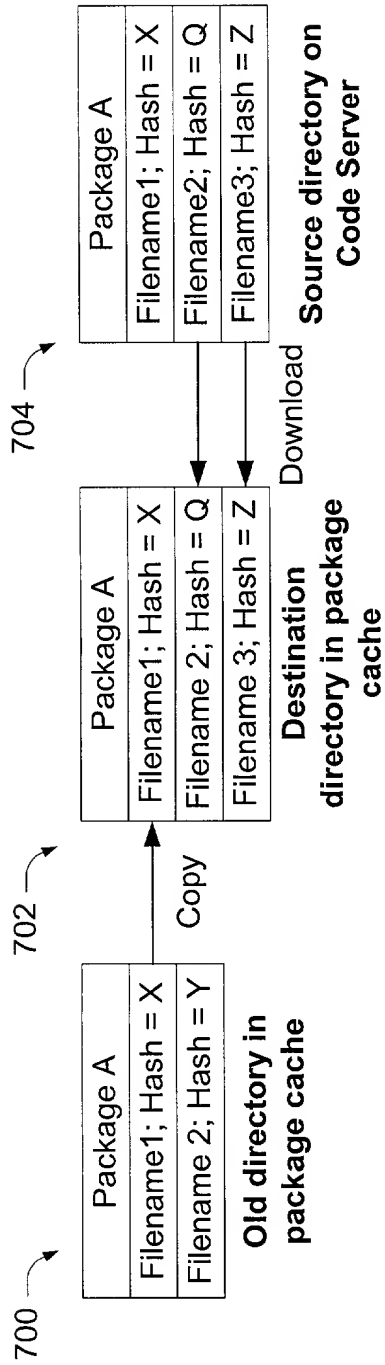


Fig. 7

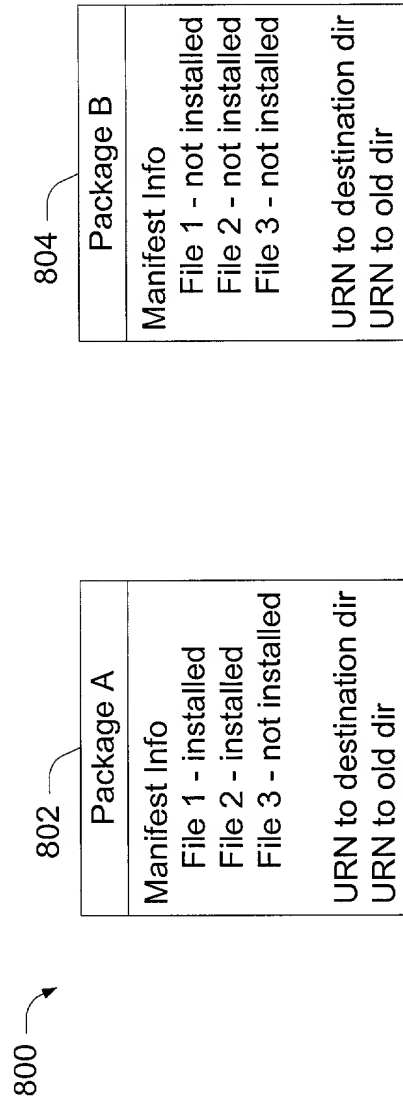
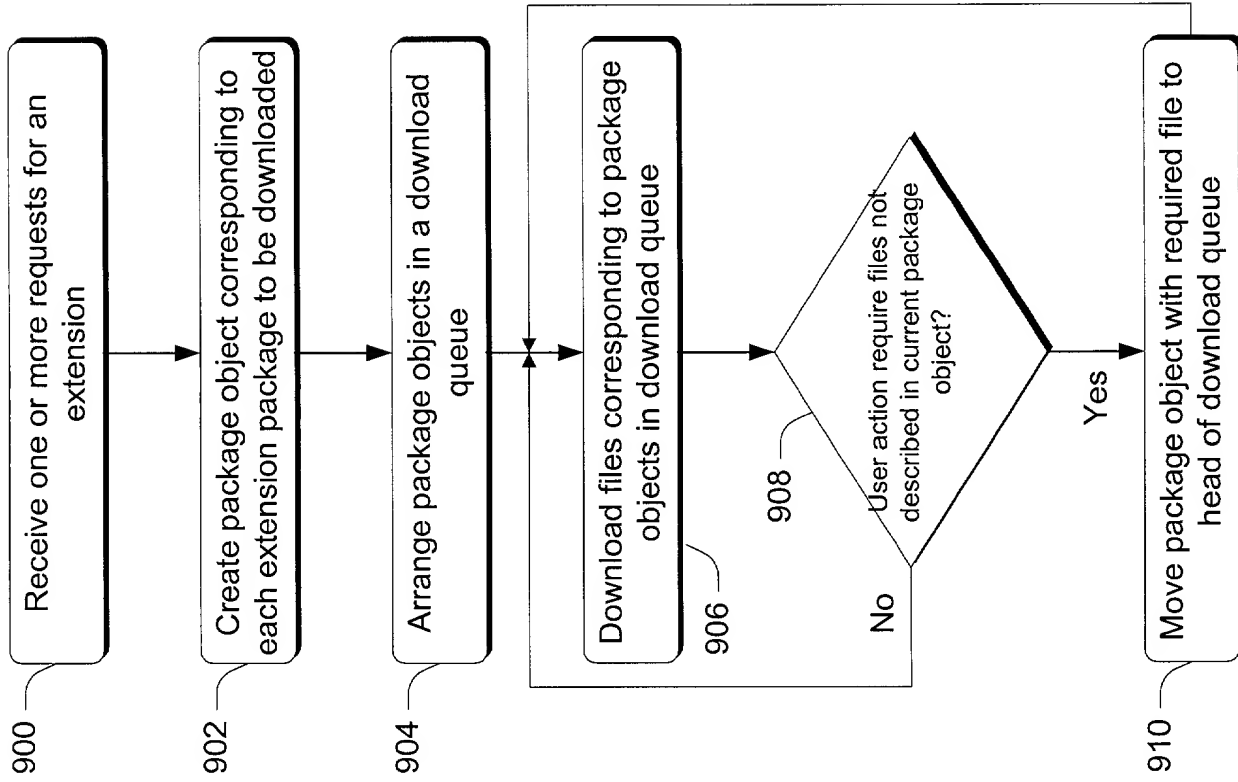


Fig. 8

Fig. 9



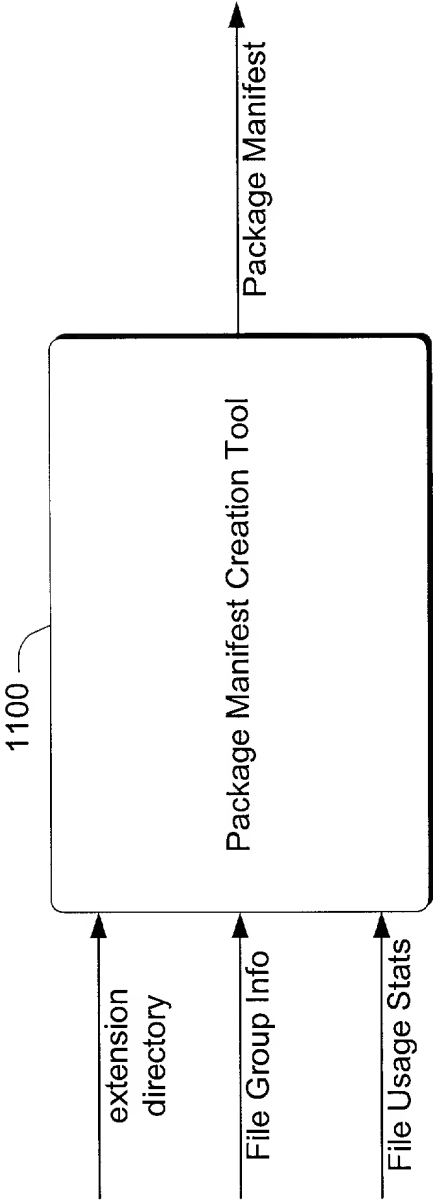
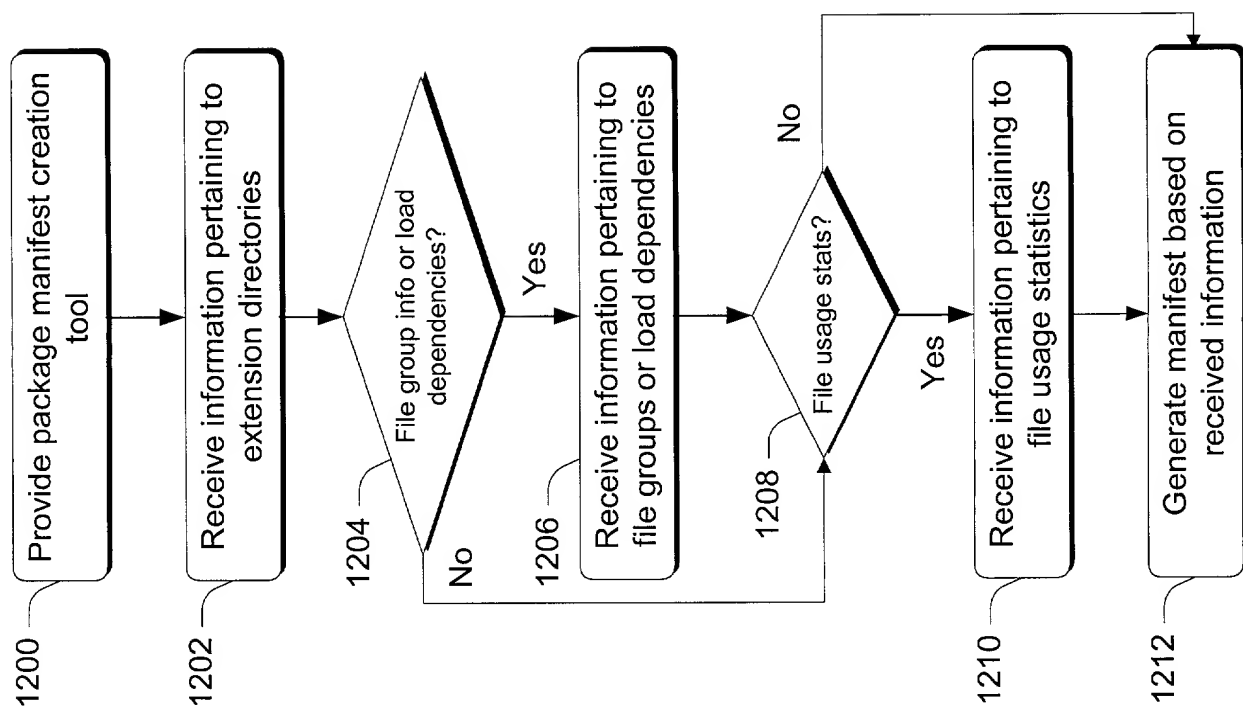


Fig. 11

Fig. 12



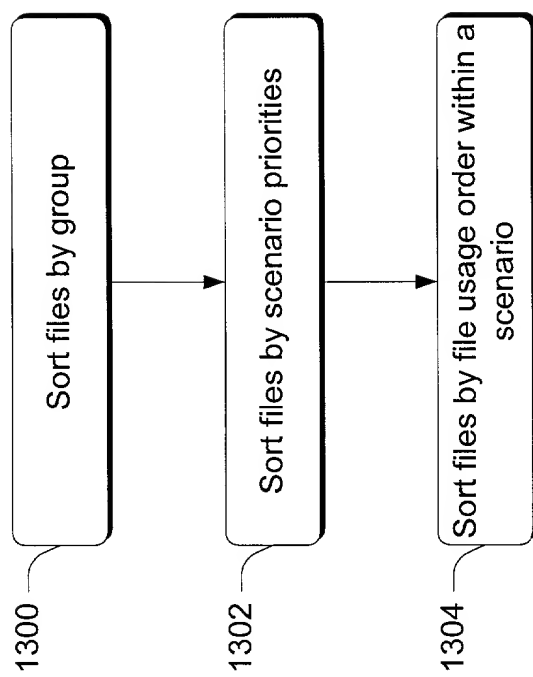
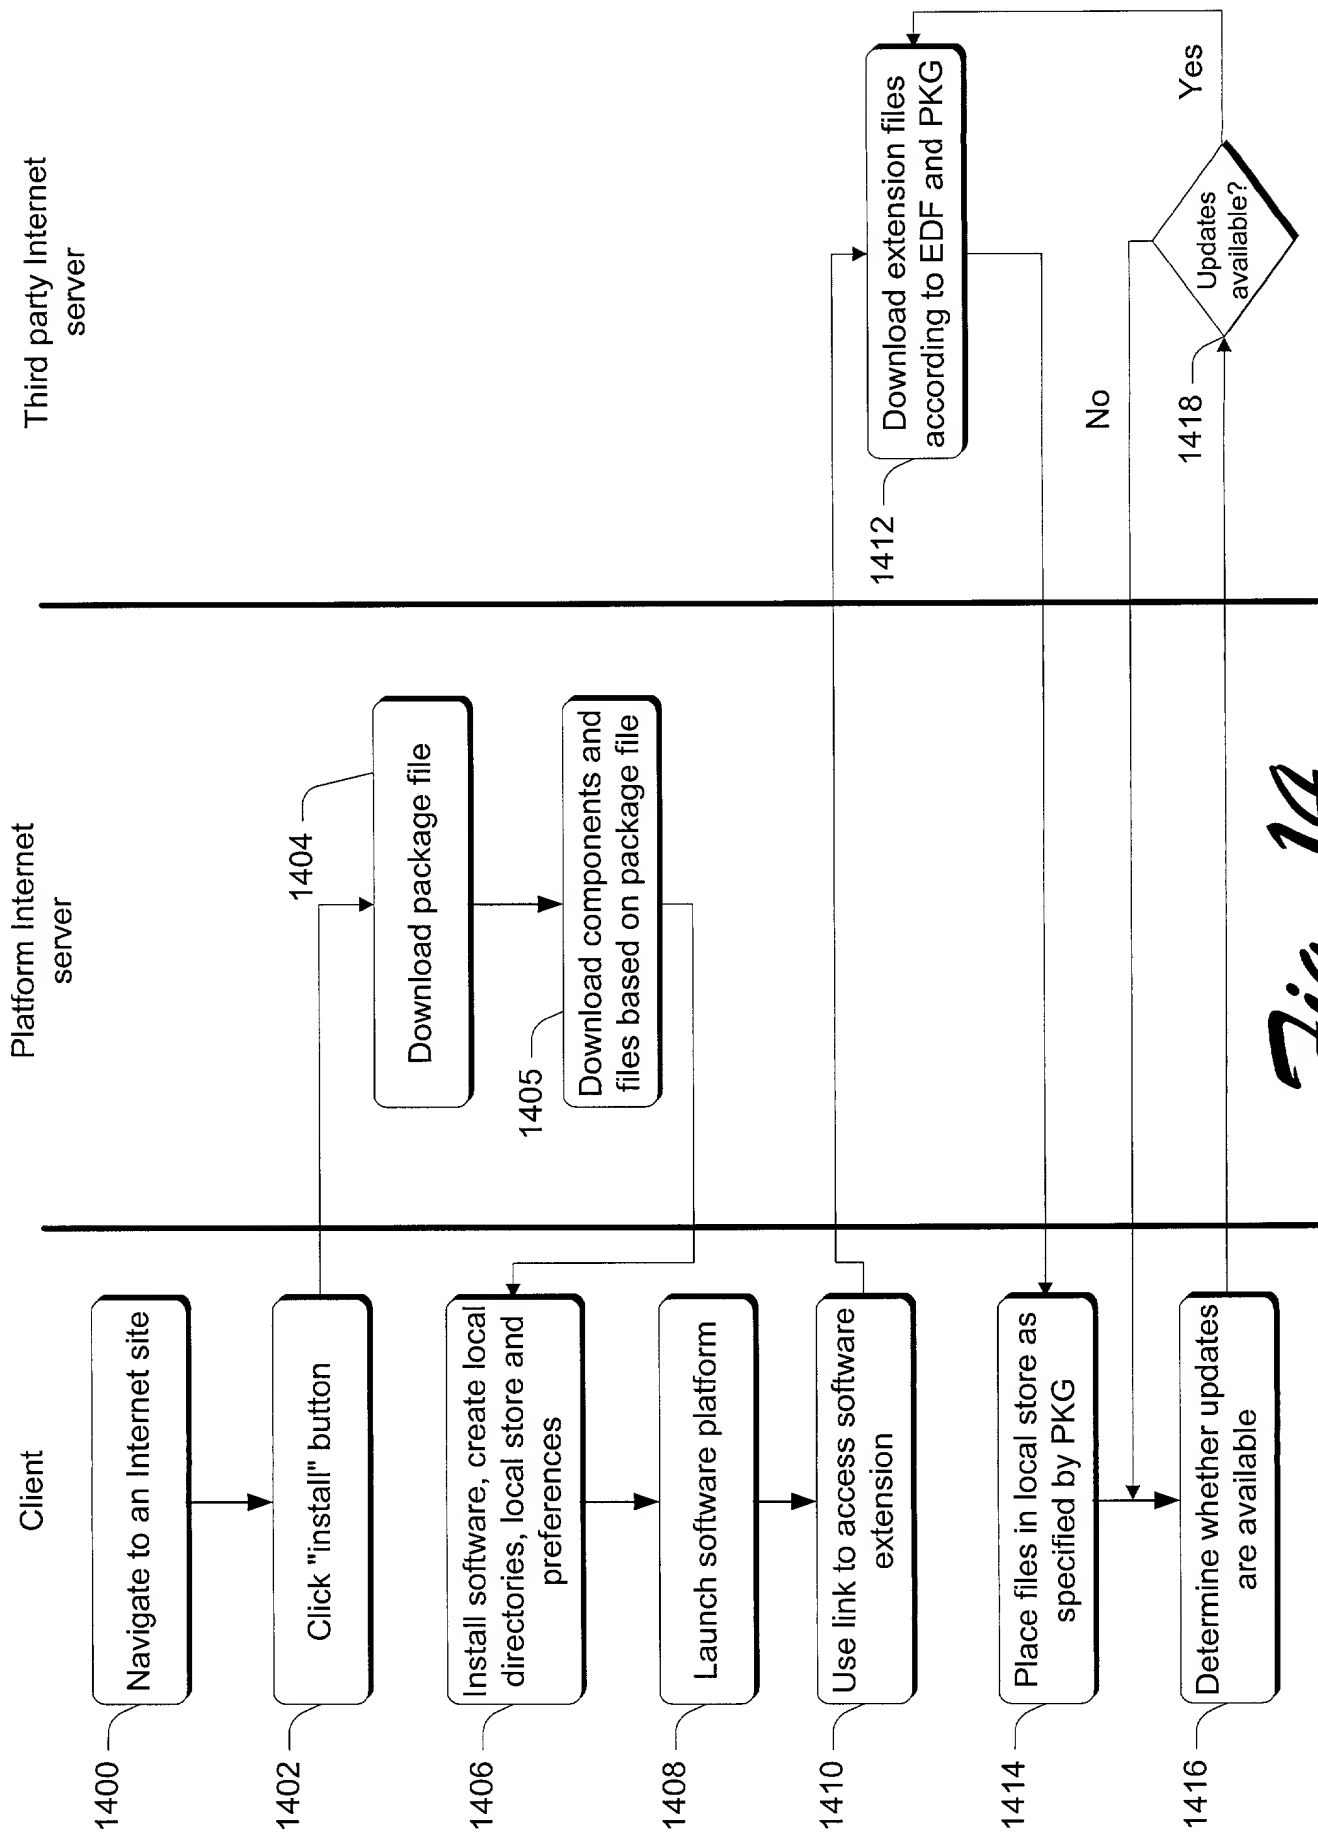


Fig. 13



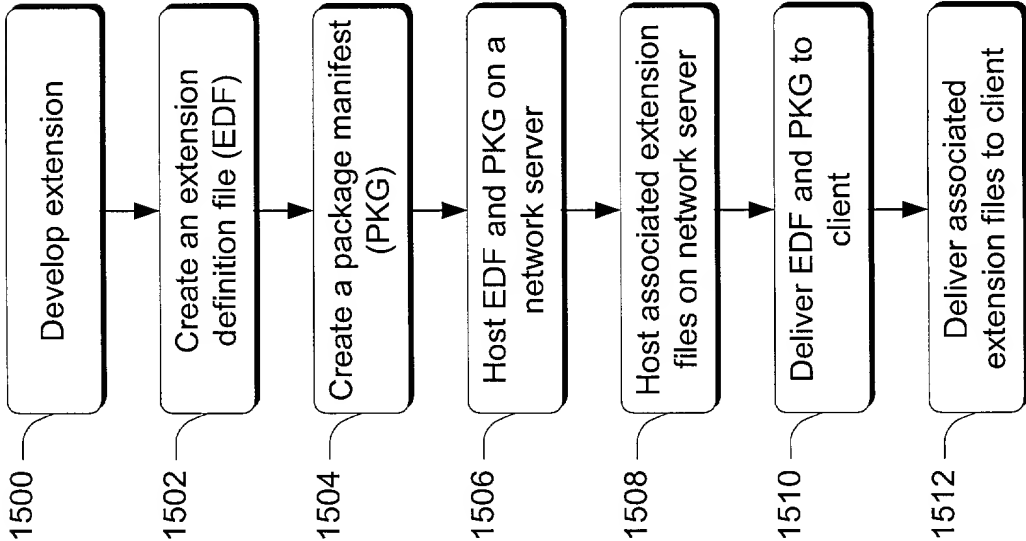
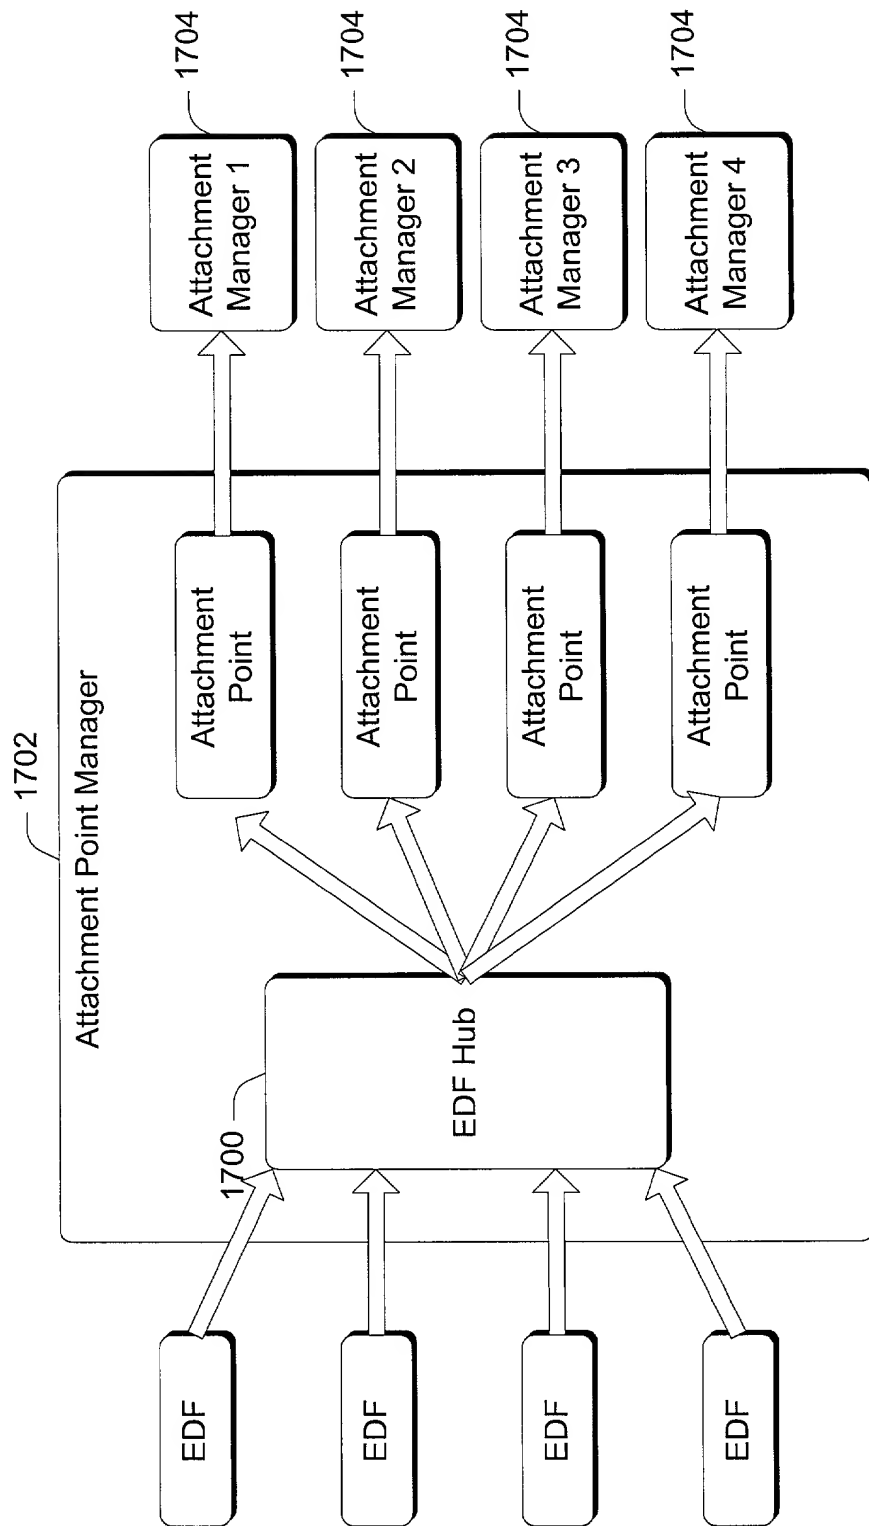


Fig. 15

```

<cat:extensionCatalog xmlns:cat="urn:schemas-microsoft-
com:netdocs_edfcatalog.v1"
  lastUpdate="2000-01-15 8:43:52"
  description = "Catalog of extensions from hosted service"
>
<cat:extension extensionURN="urn:planner.netdocs.com"
  name="Planner"
  packageURN ="urn:planner.netdocs.com.ENv1"
  url="http://netdocs/extensions/planner/v1/EN/sc.cab"
  language="English"
  version="1"
  defaultLanguage="yes"
/>
<cat:extension extensionURN="urn:planner.netdocs.com"
  name="Planner"
  packageURN ="urn:planner.netdocs.com.FRv1"
  url="http://netdocs/extensions/planner/v1/FR/sc.cab"
  language="French"
  defaultVersion="yes"
  version="1"
/>
<cat:extension extensionURN="urn:planner.netdocs.com"
  name="Planner"
  packageURN ="urn:planner.netdocs.com.ENv1.1"
  url="http://netdocs/extensions/planner/v1.1/EN/sc.cab"
  language="English"
  version="1.1"
  defaultLanguage="yes"
  defaultVersion="yes"
/>
</cat:extensionCatalog>
    
```

Fig. 16

*Fig. 17*

007.030" 0020500

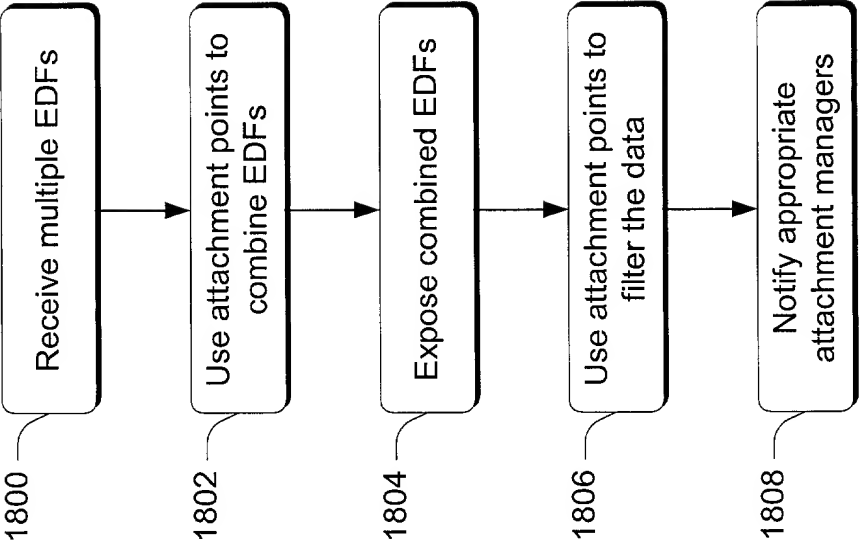


Fig. 18

007390" 66366560

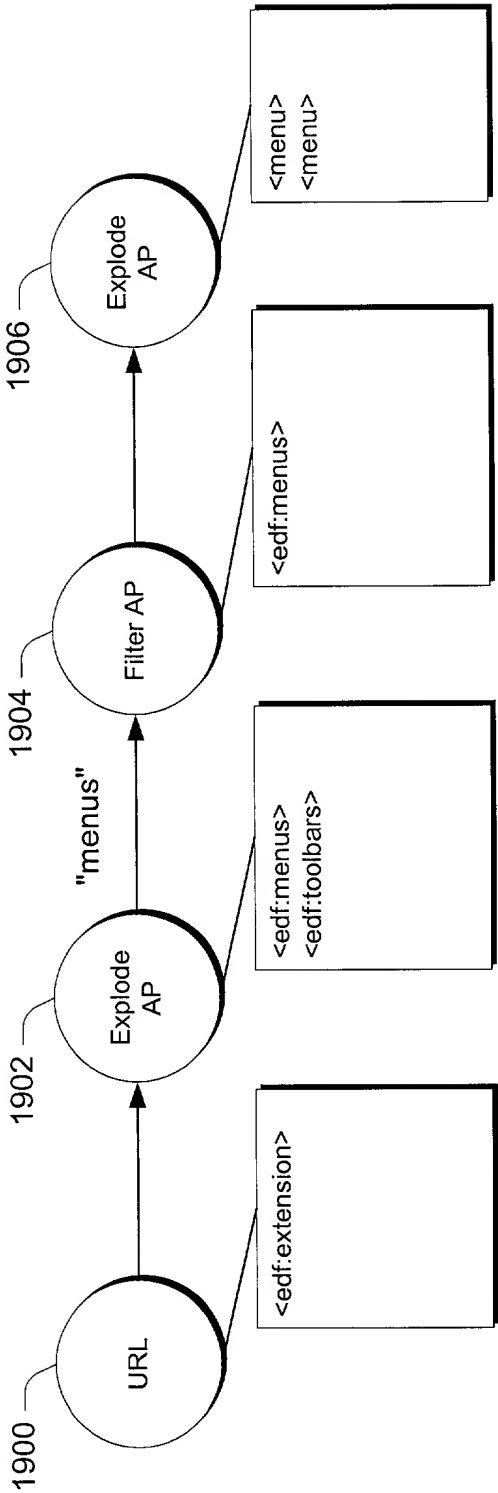


Fig. 19

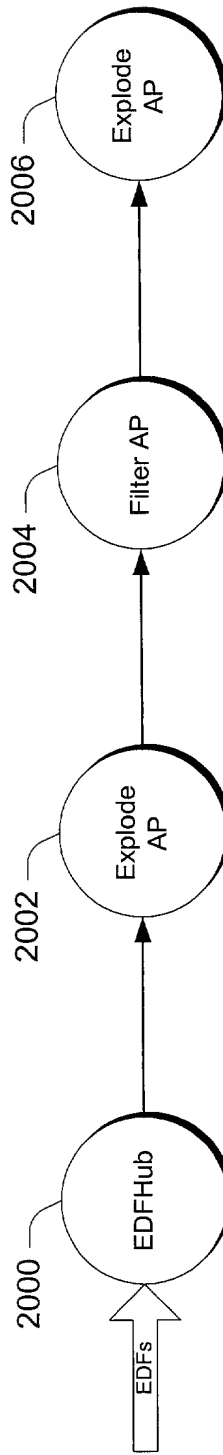


Fig. 20